




↓ PRODUCT DESCRIPTION

The Line 093 is an LED linear with an output of 30 watts per metre. Its light is comparable to that of a fluorescent tube, but it is much smaller and gives off less heat. Its colour temperature is also easier to manage, and it produces no electromagnetic pollution. It is made up of LED bars that connect end to end to create preset lengths as required. Enables it to be oriented at an angle of 40 or 180 degrees, and it is very easy to install and fix.

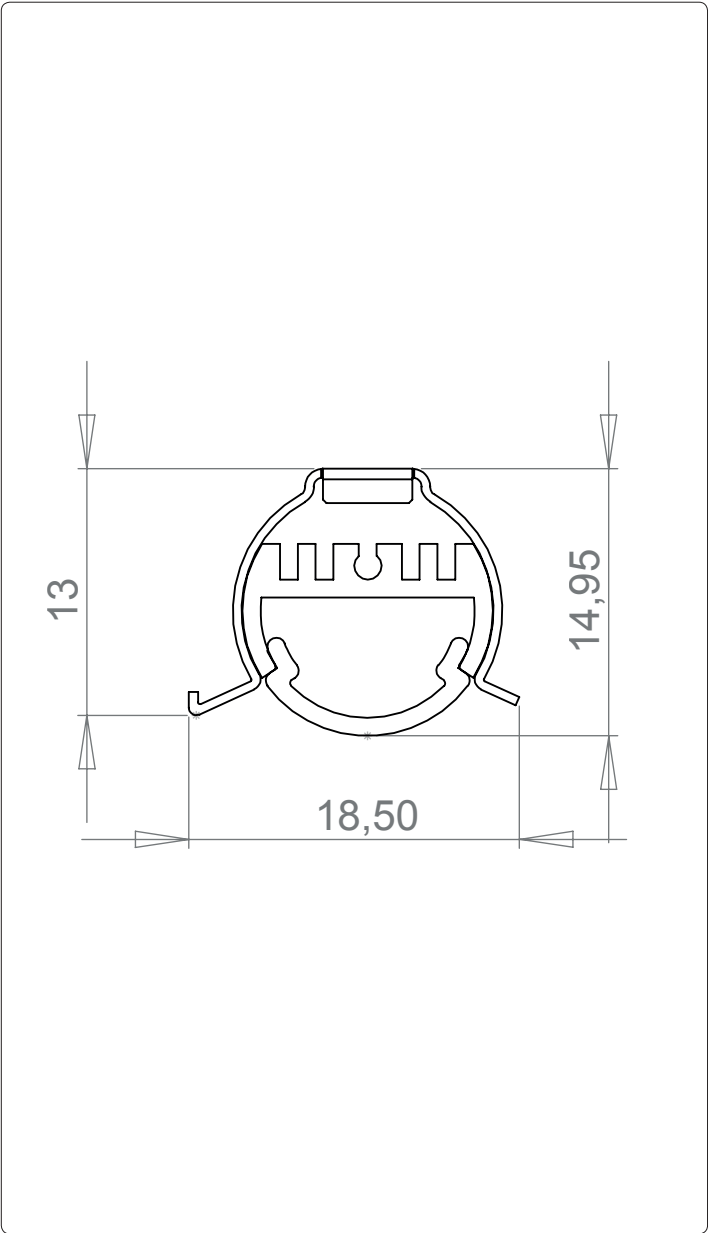

↓ OUTPUT

30W /m

↓ POWER SUPPLY

24V

↓ IP RATING

IP 40

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE ETL III

↓ SOURCES

- Luminous flux according to Bining : 2900 lumens by meter;
- Colour temperature : from 2700 K to 5000 K;
- Service Range : 70 % of nominal flux after 50000 hours;
- Colour Rendering Index : CRI 80 or CRI 90.

↓ OPTICAL CHARACTERISTICS

- Lenticular filter for profile. Transmission > 90%;
- Beam Angle : 115°.

↓ ELECTRICAL CHARACTERISTICS

- Power Supply Line 093 : Constant voltage 24V;
- Supply Connectors : Wire outlet section 0,5mm²/ AWG20, 200 cm, polarised, pre-stripped;
- Power Output : 30 W per meter;
- Electrical Classification : Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Operating temperature : - 5° + 40°;
- Lengths by multiples of 7.5 cm + 2cm;
- Delivered with Aluminum profile (including end caps -2 × 2 mm thick, filter & mounting clips);
- Adjustable profile with a total angle of 40° or 180° (depending on the mounting clip);
- ROHS components;
- Inside use only.

↓ SPECIFICITIES

- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	LI093	
Specification	AA	
Colour	Aluminium	AL
	Black	BK
Colour temperature	2700K	27
	3000K	30
	3500K	35
	4000K	40
	5000K	50
Lengths	9,5 cm	007
	17 cm	015
	24,5 cm	022
	...	...
	189,5 cm	187
	197 cm	195
	204,5 cm	202
REFERENCE	LI093 - A A - AL - 30 - 187	

↓ LENGTHS | POWER

Lengths* (cm)	Power (w)
9,5	2,25
17	4,5
24,5	6,75
32	9
39,5	11,25
47	13,5
54,5	15,75
62	18
69,5	20,25
77	22,5
84,5	24,75
92	27
99,5	29,25
107	31,5
114,5	33,75
122	36
129,5	38,25
137	40,5
144,5	42,75
152	45
159,5	47,25
167	49,5
174,5	51,75
182	54
189,5	56,25
197	58,5
204,5	60,75

* Overall length including aluminum profile, cover, protective endpiece, and spare cable outlet