




↓ PRODUCT DESCRIPTION

The Line 070 has outputs of 24 watts per linear metre. It fits discreetly into display windows, shelves, and niches, and give a diffuse light. With an initial length of 12 cm, this LED linear can be combined to create the required length. It offers a range of colour temperatures for harmonious lighting. Its compact clipped profile enables him to be oriented at an angle of 40 or 180 degrees, and it is very easy to install and fix.

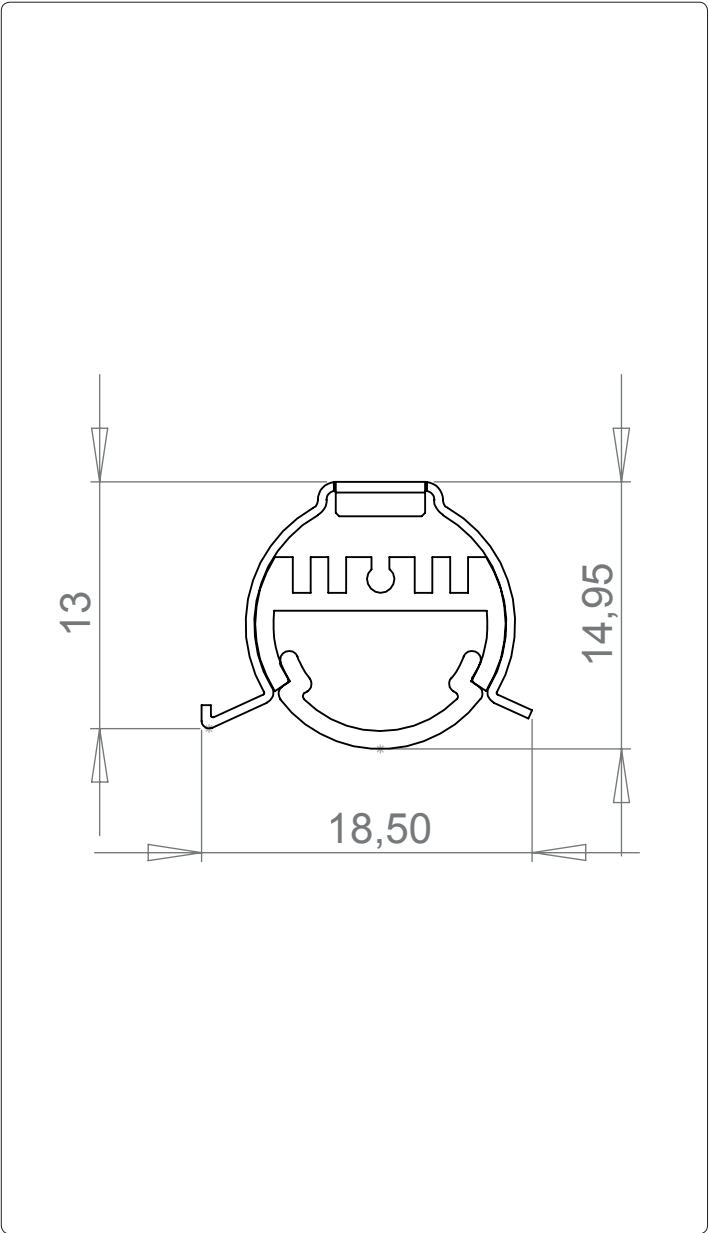

↓ OUTPUT

24W /m

2200 lm/m

↓ POWER SUPPLY

24V

1-10V

DMX

↓ IP RATING

IP 40

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2

CE

III

↓ CRI

IRC80

IRC90

↓ DEGREES

↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

5000K

↓ COLOURS

AL

BK

↓ SOURCES

- Luminous flux according to Bining : 2200 lumens by meter;
- Colour temperature : from 2700 K to 5000 K;
- Service Range : 70 % of nominal flux after 50000 hours;
- Colour Rendering Index : CRI 80 or CRI 90.

↓ OPTICAL CHARACTERISTICS

- Lenticular filter for profile. Transmission > 90%;
- Beam Angle : 115°.

↓ ELECTRICAL CHARACTERISTICS

- Power Supply Line 070 : Constant voltage 24V;
- Supply Connectors : Wire outlet section 0,5mm²/ AWG20, 200 cm, polarised, pre-stripped;
- Power Output : 24 W per meter;
- Electrical Classification : Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Operating temperature : - 5° + 40°;
- Lengths by multiples of 10 cm + 2cm;
- Delivered with Aluminum profile (including end caps -2 × 2 mm thick, filter & mounting clips);
- Adjustable profile with a total angle of 40° or 180° (depending on the mounting clip);
- ROHS components;
- Inside use only.

↓ SPECIFICITIES

- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	LI070	
Specification	AA	
Colour	Aluminium	AL
	Black	BK
Colour temperature	2700K	27
	3000K	30
	3500K	35
	4000K	40
	5000K	50
Lengths	12 cm	010
	22 cm	020
	32 cm	030
	...	...
	182 cm	180
	192 cm	190
	202 cm	200
REFERENCE	LI070 - A A - AL - 30 - 030	

↓ LENGTHS | POWER

Lengths* (cm)	Power (w)
12	2,4
22	4,8
32	7,2
42	9,6
52	12
62	14,4
72	16,8
82	19,2
92	21,6
102	24
112	26,4
122	28,8
132	31,2
142	33,6
152	36
162	38,4
172	40,8
182	43,2
192	45,6
202	48

* Overall length including aluminum profile, cover, protective endpiece, and spare cable outlet