




↓ PRODUCT DESCRIPTION

With its high-performance luminous flux, this small recessed LED combines high-quality lighting with unparalleled efficiency and reliability. This Loupi recessed light combine superbly unfussy design with a compact form factor. It is simple, compact, and inconspicuous, but uses advanced technology. The light is very easy to fit in shop windows, display units, and other small spaces.

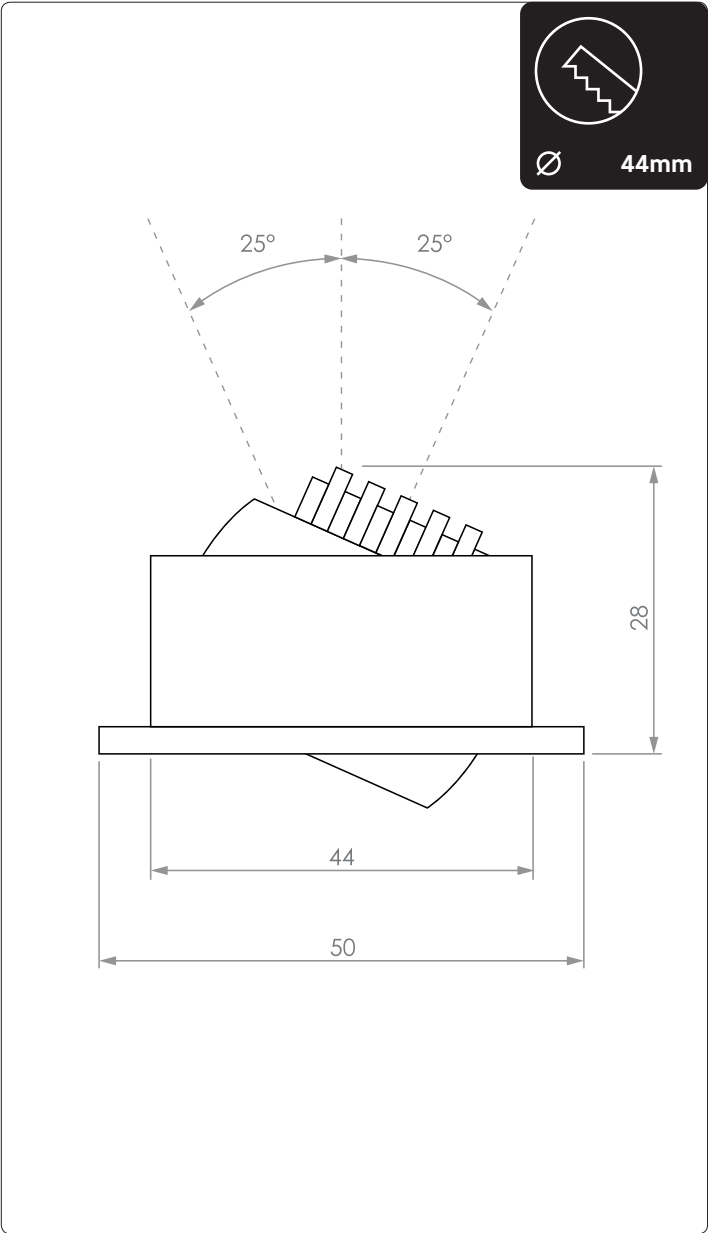

↓ OUTPUT

2,1W

↓ LUMENS

200lm

↓ CRI

IRC80

IRC90

↓ POWER SUPPLY

700mA

↓ DIMMING

1-10V

DMX

↓ DEGREES

10°

18°

28°

40°

ELL

↓ IP RATING

IP 40

↓ USE

↓ COLOUR TEMPERATURE

2400K

2700K

3000K

3500K

4000K

5000K

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2

CE

ETL

III

↓ COLOURS

BK

WH

AL

CH

GO

RAL COLOURS

- ↓ SOURCES

  - Luminous flux according to Bining: 200 lumens;
  - Colour temperature: 2400K to 5000K;
  - Service Range: 70 % of nominal flux after 25 000 hours;
  - Colour Rendering Index: CRI 80 or CRI 90.
- ↓ OPTICAL CHARACTERISTICS

  - PMMA acrylic lens, efficiency ~90 %;
  - Available degrees: 10°, 18°, 28°, 40° & Elliptic.
- ↓ ELECTRICAL CHARACTERISTICS

  - Constant current supply: 700 mA;
  - Supply connection: Polarised output connectors;
  - Power consumption to 2.1W max, excluding supply;
  - Electrical Classification: Class III SELV device.
- ↓ MECHANICAL CHARACTERISTICS

  - Dimensions: Diameter 50 mm, Overall Height 28 mm;
  - Adjustable to a total angle of 40°;
  - Operating temperature: -5° +40°;
  - ROHS components;
  - Interior use only.
- ↓ SPECIFICITIES

  - Electrolytic treatment available;
  - 3 years guarantee.

↓ CLASSIFICATION

Product Ref.		IN001				
Specification			AA			
Colour	Black			BK		
	White			WH		
	Aluminum			AL		
	Chromium			CU		
	Gold			CU		
	RAL			CU		
Colour temperature	2400K				24	
	2700K				27	
	3000K				30	
	3500K				35	
	4000K				40	
	5000K				50	
Degrees	10°					10
	18°					18
	28°					28
	40°					40
	Elliptic					EL
REFERENCE		IN00 1- AA - BK - 24 - 10				