

Insert 10-O round fixed

REF: IN10O-RF


OUTDOOR

EN



↓ PRODUCT DESCRIPTION

This round LED recessed light is designed for humid indoor locations, or for outdoor use. It is suitable for general, accent or ambient lighting. Its simple form and small size make it easy to fit, and it can produce a wide variety of colour temperatures and beam sizes. The light has internal jointing to make it watertight.

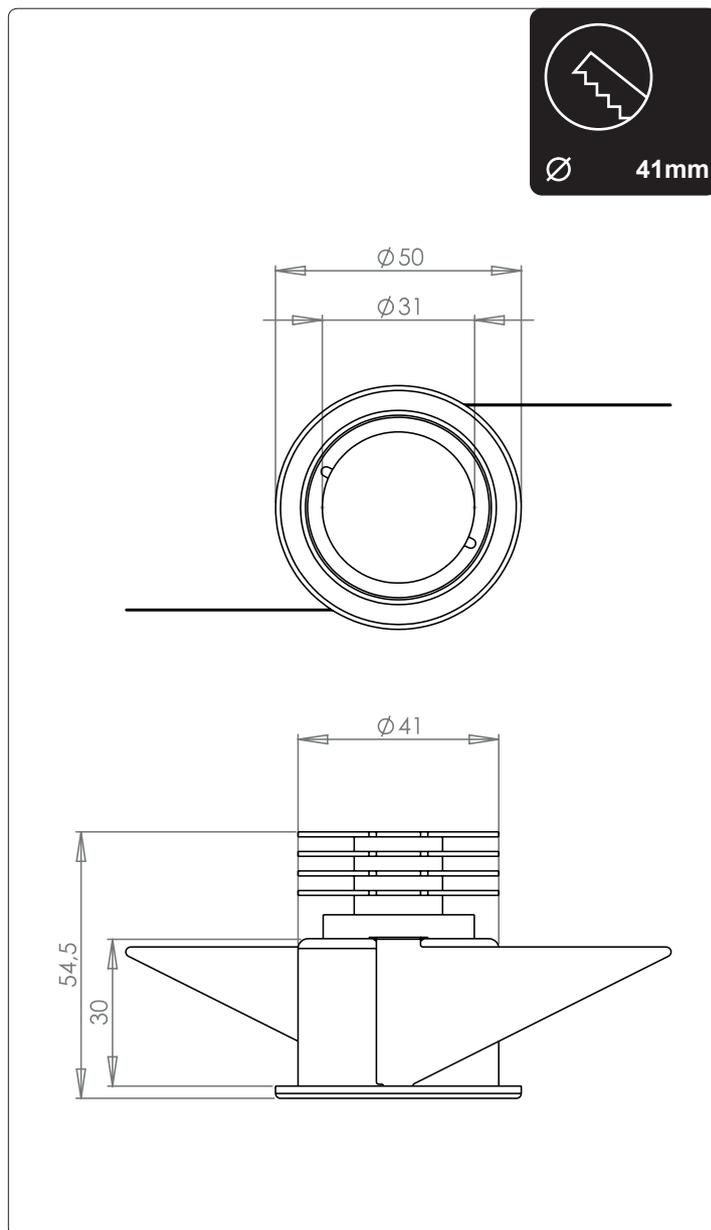

↓ OUTPUT

8W

↓ LUMENS

800lm

↓ COLOUR RENDERING INDEX

IRC90

↓ POWER SUPPLY

0,7A

↓ DIMMING



1-10V



DMX

CASAMBI

↓ DEGREES

15°

25°

40°

ELL

↓ IP RATING

IP 65

↓ USE



↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2



↓ COLOURS

BK

CUSTOM

Insert 10-O round fixed

REF: IN100-RF

OUTDOOR

EN

↓ SOURCES

- Luminous flux according to Bining : 800 lumens;
- Colour temperature : 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range : 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index : CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees : 15°, 25°, 40°, ELL.

↓ ELECTRICAL CHARACTERISTICS

- Constant current supply : 0,7A;
- Supply connection : Polarised output connectors;
- Power consumption to 8W max, excluding supply;
- Electrical Classification : Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Dimensions : Diameter 50 mm, Overall Height 54.5mm;
- Operating temperature : -5° +40°;
- ROHS components;
- Exterior use.

↓ SPECIFICITIES

- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	IN100			
Specification	RF			
Colour	Black		BK	
	RAL		CU	
Colour temperature	2700K		27	
	3000K		30	
	3500K		35	
	4000K		40	
Degrees	15			15
	25			25
	40			40
	ELL			ELL
REFERENCE	IN100 - RF - BK - 27 - 25			

Insert 10-O Rond fixe

ACCESSOIRES

REF : IN100-RF

OUTDOOR

EN

↓ CONNECTORS POWER SUPPLY IN 24V



ACIN010COCIRCPXXMKR
Piccolo circuit with sheath
heat-shrinkable for INSERT 10



Honeycomb INSERT 10-0