Micro C Piccolo

REF: SC000-P

TRACKS EN

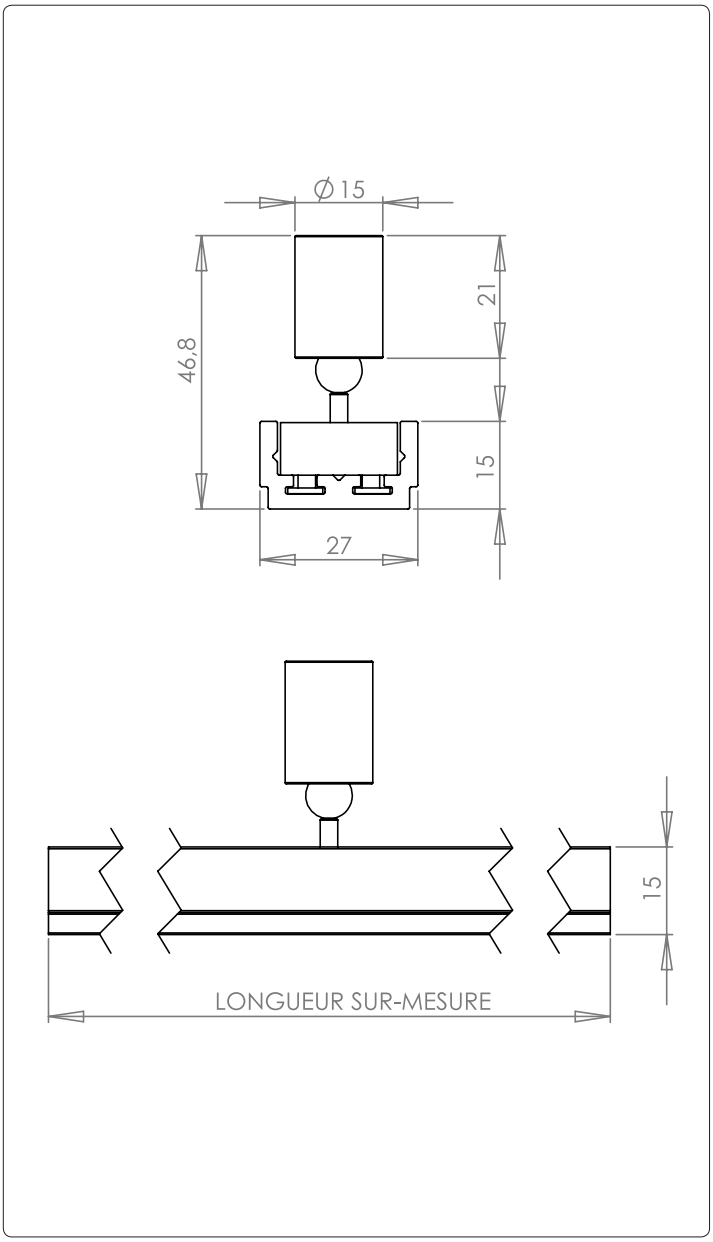

↓ PRODUCT DESCRIPTION

Attached by simple magnetic contact to a track equipped with low voltage conductors, this microspot is extremely easy to position, move, and replace. With high luminous efficacy, this Piccolo microspot with its magnetic ball joint is used for precision lighting. The Micro C Piccolo's miniaturized technology and understated design make it easy to install, and provide fully adjustable lighting.

↓ OUTPUT

2W

↓ LUMENS

150lm

↓ CRI

IRC90

↓ POWER SUPPLY

500mA

↓ DIMMING

DALI

↓ DEGREES

16° 24° 40° ELL

↓ IP RATING

IP 40

↓ USE

↓ COLOUR TEMPERATURE

2400K 2700K 3000K 3500K 4000K 5000K

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE ETL III

↓ COLOURS

BK WH CUSTOM

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Design and manufacturing Loupi Lighting systems, all rights reserved.
Registered design and patents.
Specification subjected to change without prior notice.

Micro C Piccolo

REF: SC000-P

TRACKS EN

↓ SOURCES
- **Luminous flux according to Bining: 150 lumens;**
- **Colour temperature: 2400 K to 5000 K;**
- **Service Range: 70 % of nominal flux after 25 000 hours;**
- **Colour Rendering Index: CRI 90.**

↓ OPTICAL CHARACTERISTICS
- **PMMA acrylic lens, efficiency ~90 %;**
- **Available degrees: 16°, 24°, 40° & Elliptic.**

↓ ELECTRICAL CHARACTERISTICS
- **Constant supply voltage 24V;**
- **Electric transmission by magnetic contact;**
- **Reversible polarity and hot plug;**
- **Power consumption to 2W max, excluding supply;**
- **Electrical classification: Class III SELV device.**

↓ MECHANICAL CHARACTERISTICS
- **Electronic circuit encased in a fire proof polycarbonate housing;**
- **Articulating base, patented magnetic ball joint;**
- **Attachment by magnetic contact;**
- **Operating temperature: -5° +40°;**
- **ROHS components;**
- **Interior use only.**

↓ SPECIFICITIES
- **Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;**
- **Electrolytic treatment available;**
- **Color track profile: White or Black;**
- **3 years garantee.**

↓ CLASSIFICATION

Product Ref.		SC000				
Specification			P			
Colour	**Black**			BK		
	White			WH		
	Brushed Nickel			CU		
	Chromium			CU		
	Brass			CU		
	RAL			CU		
Colour temperature	**2400K**				24	
	2700K				27	
	3000K				30	
	3500K				35	
	4000K				40	
	5000K				50	
Degrees	**16°**					16
	24°					24
	40°					40
	Elliptic					EL
REFERENCE		SC000 -	P -	BK -	30 -	24

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Design and manufacturing Loupi Lighting systems, all rights reserved.
Registered design and patents.
Specification subjected to change without prior notice.

Micro C Piccolo
ACCESSORIES

REF : SC000-P

TRACKS EN

↓ OPTICAL ACCESSORIES

ACMMC01OPNIDABBKD12
Honeycomb MICRO C
Ø12,8mm

ACSC000OPSNOOTBKL14C
Snoot MICRO C
Ø12,8mm Lg 14mm Noir

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Conception & fabrication LOUPI Lighting System, droits réservés.
Marques, modèles et brevets déposés, reproduction interdite.
Document non contractuel. Les spécifications peuvent être modifiées sans avis préalable.