





## ↓ PRODUCT DESCRIPTION


Simply magnetically fixed to a track equipped with low-voltage conductors. It is extremely easy to install, position, move, and replace. This unique small spot from the Piccolo range has a 360-degree magnetic ball joint and mini cap. It is emblematic of Loupi's expertise. Used for accent and precision lighting, this spot combines all the advantages of LED technology: less bulk, lower energy consumption and greater efficiency.

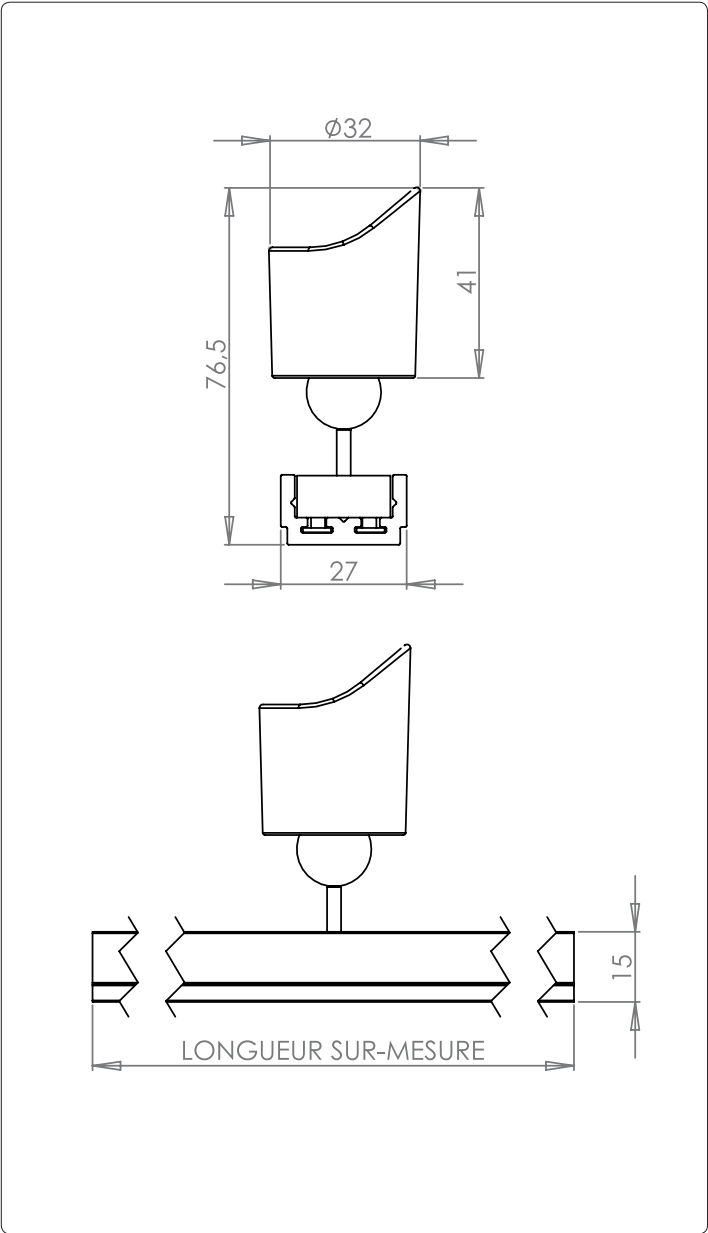


## ↓ OUTPUT



## ↓ POWER SUPPLY




## ↓ IP RATING




## ↓ STANDARDS COMPLIANCE




## ↓ LUMENS




## ↓ DIMMING




## ↓ USE




## ↓ CRI



## ↓ DEGREES



## ↓ COLOUR TEMPERATURE



## ↓ COLOURS



↓ SOURCES

- Luminous flux according to Bining: 250 lumens;
- Colour temperature: 2400 K to 5000 K;
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 10°, 18°, 28°, 40° et Elliptic.

↓ ELECTRICAL CHARACTERISTICS

- Constant current supplu 700mA;
- Electric transmission by magnetic contact;
- Reversible polarity and hot plug;
- Power consumption to 3.5W max, excluding supply;
- Electrical classification: Class III SELV device

↓ MECHANICAL CHARACTERISTICS

- Electronic circuit encased in a fire proof polycarbonate housing;
- Articulating base, patented magnetic ball joint;
- Attachment by magnetic contact;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;
- Electrolytic treatment available;
- Color track profile: White or Black;
- 3 years guarantee.

↓ CLASSIFICATION

|                    |                          |   |  |    |    |
|--------------------|--------------------------|---|--|----|----|
| Product Ref.       | SC001                    |   |  |    |    |
| Specification      |                          | P |  |    |    |
| Colour             | Black                    |   |  | BK |    |
|                    | White                    |   |  | WH |    |
|                    | Brushed Nickel           |   |  | CU |    |
|                    | Chromium                 |   |  | CU |    |
|                    | Gold                     |   |  | CU |    |
|                    | RAL                      |   |  | CU |    |
| Colour temperature | 2400K                    |   |  |    | 24 |
|                    | 2700K                    |   |  |    | 27 |
|                    | 3000K                    |   |  |    | 30 |
|                    | 3500K                    |   |  |    | 35 |
|                    | 4000K                    |   |  |    | 40 |
|                    | 5000K                    |   |  |    | 50 |
| Degrees            | 10°                      |   |  |    | 10 |
|                    | 18°                      |   |  |    | 18 |
|                    | 28°                      |   |  |    | 28 |
|                    | 40°                      |   |  |    | 40 |
|                    | Elliptic                 |   |  |    | EL |
| REFERENCE          | SC001 - P - BK - 27 - 18 |   |  |    |    |

# Spot C Piccolo

## ACCESSORIES

REF : SC001-P

TRACKS

EN

### ↓ OPTICAL ACCESSORIES



**ACSC001OPNIDABBKD28**  
Honeycomb SPOT C  
Ø28mm



**ACSC001OPSNOOTBKL14**  
Snoot SPOT C  
Ø28,0mm Lg 14mm Noir



**ACSC001OPSNOOTBKL20**  
Snoot SPOT C  
Ø28,0mm Lg 20mm Noir