


Spot D15

REF : SD015-A

SPOTS EN

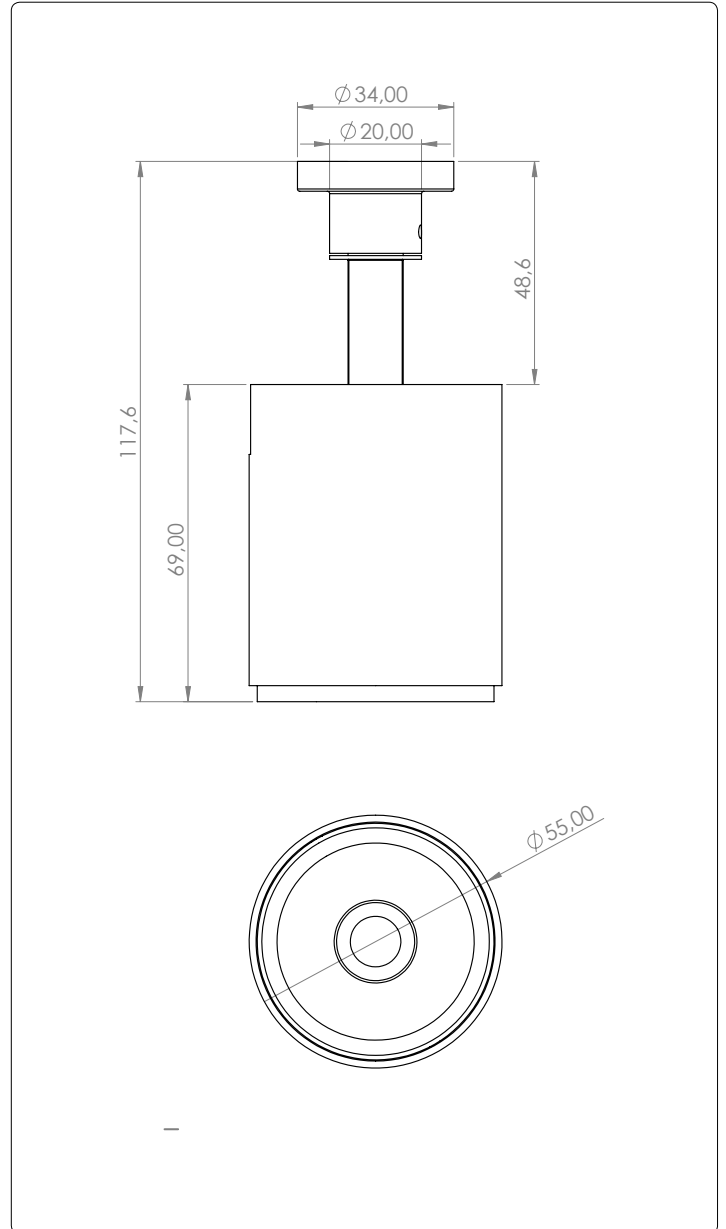

↓ PRODUCT DESCRIPTION

Spot D15 - Powerful LED accent and architectural round spotlight with adjustable aluminium body.
Threaded safety lock.
Passive heat dissipation for source temperature control preserving LED life.

Interchangeable lenses (10°, 15°, 40°, Elliptical) by simple magnetic contact.

↓ OUTPUT

15W

↓ LUMENS

1500lm

↓ CRI

IRC90

↓ POWER SUPPLY

1,2A

↓ DIMMING



↓ DEGREES (INTERCHANGEABLE LENSES)



↓ IP RATING

IP 40

↓ USE



↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2



↓ COLOURS

BK

WH

CUSTOM

↓ SOURCES

- Luminous flux according to Bining: 1500 lumens
- Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 10°, 15°, 40° et ELL.

↓ ELECTRICAL CHARACTERISTICS

- Constant supply voltage 24V;
- Electric transmission by magnetic contact;
- Reversible polarity and hot plug;
- Power consumption to 15W max, excluding supply;
- Electrical classification: Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Articulating base, patented magnetic ball joint;
- Attachment by magnetic contact;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Electrolytic treatment available;
- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	SD015		
Specification	A		
Colour	Black		BK
	White		WH
	Aluminium		AL
	Chromium		CU
	Gold		CU
	RAL		CU
Colour temperature	2700K		27
	3000K		30
	3500K		35
	4000K		40
Degrees	10°		10
	15°		15
	40°		40
	ELL		ELL
REFERENCE	SL005-	P-	BK- 27- 10

Spot D15

ACCESSORIES

REF : SD015-A

SPOTS EN

↓ CONNECTORS POWER SUPPLY IN 24V



ACSC005COCIRCPXX200
Piccolo circuit with sheath
heat-shrinkable for SPOT D15

↓ CONNECTORS INDEPENDENT CONNECTION TO BATTERIES



ACSCXXXCOPLITHXX010
Pack Lithium 10,4Ah



ACSCXXXCOCLITHXX35
Charger Pack Lithium
Charger 29,4V 3,5A



ACSCXXXCOPLITHXX26
Pack Lithium 2,6Ah



ACSCXXXCOCLITHXX06
Charger Pack Lithium
Charger 29,4V 0,6A



EUROPLUG

↓ FIXATION/FINITION



ACSCXXXFIPATERBK*APP
Surface mounted SPOT
Black (BK), White (WH), Custom (CU)



ACSCXXXFIPATERBKENC
Recessed peg SPOT
Black (BK), White (WH), Custom (CU)



ACSD0XXFIPATLGBK
Tall peg SPOT
Black (BK), White (WH), Custom (CU)



ACBBL15OPNIDABBKD51C
Honeycomb
SPOT D15



ACBBL15OPSNOOTBKL10C
Snoot Spot D15
Lg 10mm black