

# Spot L5 Piccolo

REF: SL005-P


TRACKS

EN



## ↓ PRODUCT DESCRIPTION

The L5 Piccolo spot is the long version of the C5 Piccolo. This spot attaches magnetically to a track equipped with low-voltage conductors. It is extremely easy to install, position, move, and replace. This discreetly elegant light is surprisingly powerful for its small size. It provides high-quality interior lighting and unparalleled efficiency and reliability. With its magnetic contact and 360-degree ball joint, it is suitable for a wide range of precision and general lighting uses.

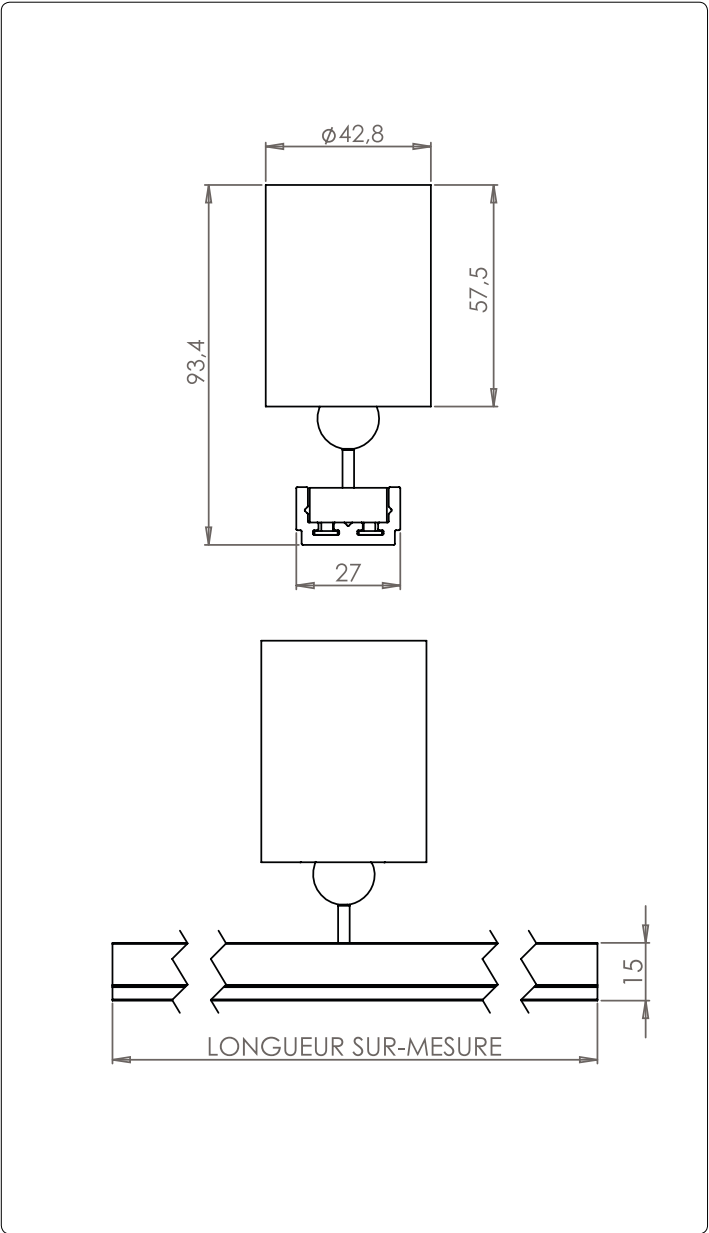

## ↓ OUTPUT



## ↓ POWER SUPPLY




## ↓ IP RATING




## ↓ STANDARDS COMPLIANCE




## ↓ LUMENS



## ↓ DIMMING



## ↓ CRI



## ↓ DEGREES



## ↓ COLOUR TEMPERATURE



## ↓ COLOURS



↓ SOURCES

- Luminous flux according to Bining: 800 lumens;
- Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 15°, 25°, 40° et ELL.

↓ ELECTRICAL CHARACTERISTICS

- Constant supply voltage 24V;
- Electric transmission by magnetic contact;
- Reversible polarity and hot plug;
- Power consumption to 9W max, excluding supply;
- Electrical classification: Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Electronic circuit encased in a fire proof polycarbonate housing;
- Articulating base, patented magnetic ball joint;
- Attachment by magnetic contact;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;
- Electrolytic treatment available;
- Color track profile: White or Black;
- 3 years guarantee.

↓ CLASSIFICATION

|                    |           |       |   |    |    |              |
|--------------------|-----------|-------|---|----|----|--------------|
| Product Ref.       |           | SL005 |   |    |    |              |
| Specification      |           |       | P |    |    |              |
| Colour             | Black     |       |   | BK |    |              |
|                    | White     |       |   | WH |    |              |
|                    | Aluminium |       |   | AL |    |              |
|                    | Chromium  |       |   | CU |    |              |
|                    | Gold      |       |   | CU |    |              |
|                    | RAL       |       |   | CU |    |              |
| Colour temperature | 2700K     |       |   |    | 27 |              |
|                    | 3000K     |       |   |    | 30 |              |
|                    | 3500K     |       |   |    | 35 |              |
|                    | 4000K     |       |   |    | 40 |              |
| Degrees            | 15°       |       |   |    |    | 15           |
|                    | 25°       |       |   |    |    | 25           |
|                    | 40°       |       |   |    |    | 40           |
|                    | ELL       |       |   |    |    | ELL          |
| REFERENCE          |           | SL005 | - | P  | -  | BK - 30 - 15 |

# Spot L5 Piccolo

## ACCESSORIES

---

REF : SL005-P

TRACKS

EN

### ↓ OPTICAL ACCESSORIES

---



**ACSC005OPNIDABBKD36**

Honeycomb SPOT C5  
Ø36,0mm