


# D10 Wallwasher piccolo

REF : WAW10-P

RAIL EN

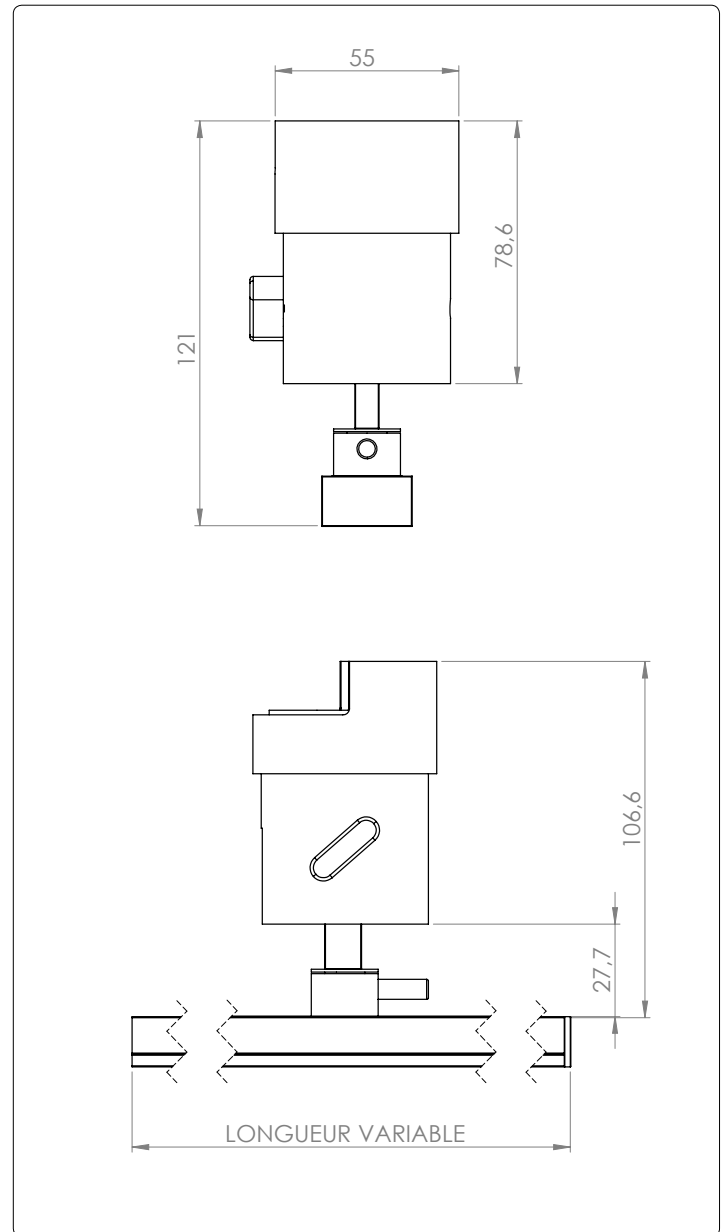

## ↓ PRODUCT DESCRIPTION

- LED spotlight for cutting and architectural lighting with adjustable aluminium body
- Switched-on by magnetic contact on Piccolo 24V track.
- Passive heat dissipation allowing the source temperature to be regulated, preserving LED life.
- Potentiometer integrated in the track contact housing to vary intensity - optional tool required.
- Manual locking of horizontal and vertical orientation.

Interchangeable lenses (15°, 25°, 40°, Wallwasher, Elliptical) by simple magnetic contact.

## ↓ OUTPUT

10W

## ↓ LUMENS

5000cd

## ↓ CRI

IRC90

IRC95  
R9>90

## ↓ POWER SUPPLY

24V

## ↓ DIMMING



1-10V



CASAMBI

DMX

## ↓ DEGREES (INTERCHANGEABLE LENSES)



WW

## ↓ IP RATING

IP 40

## ↓ USE



## ↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

## ↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2

CE

III

## ↓ COLOURS

BK

WH

CUSTOM

# D10 Wallwasher piccolo

REF : WAW10-P

RAIL

EN

## ↓ SOURCES

- Luminous flux according to Bining: 5000cd on the axis
- Colour temperature: 2700 K to 4000 K
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

## ↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Focale wallwasher

## ↓ ELECTRICAL CHARACTERISTICS

- On 24V tracks
- Luminaire electrical power up to 10W.

## ↓ MECHANICAL CHARACTERISTICS

- GOBO holder;
- Articulated joint
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

## ↓ SPECIFICITIES

- Electrolytic treatment available;
- 3 years guarantee.

## ↓ CLASSIFICATION

Product Ref.		WAW10		
Specification		P		
Colour	Black			BK
	White			WH
	Aluminium			AL
	Chromium			CU
	Gold			CU
	RAL			CU
Colour temperature	2700K			27
	3000K			30
	3500K			35
	4000K			40
REFERENCE		WAW10- P-	BK-	27