


# Mast C RCA

REF : MC00 x - ARCA

MÂTS EN

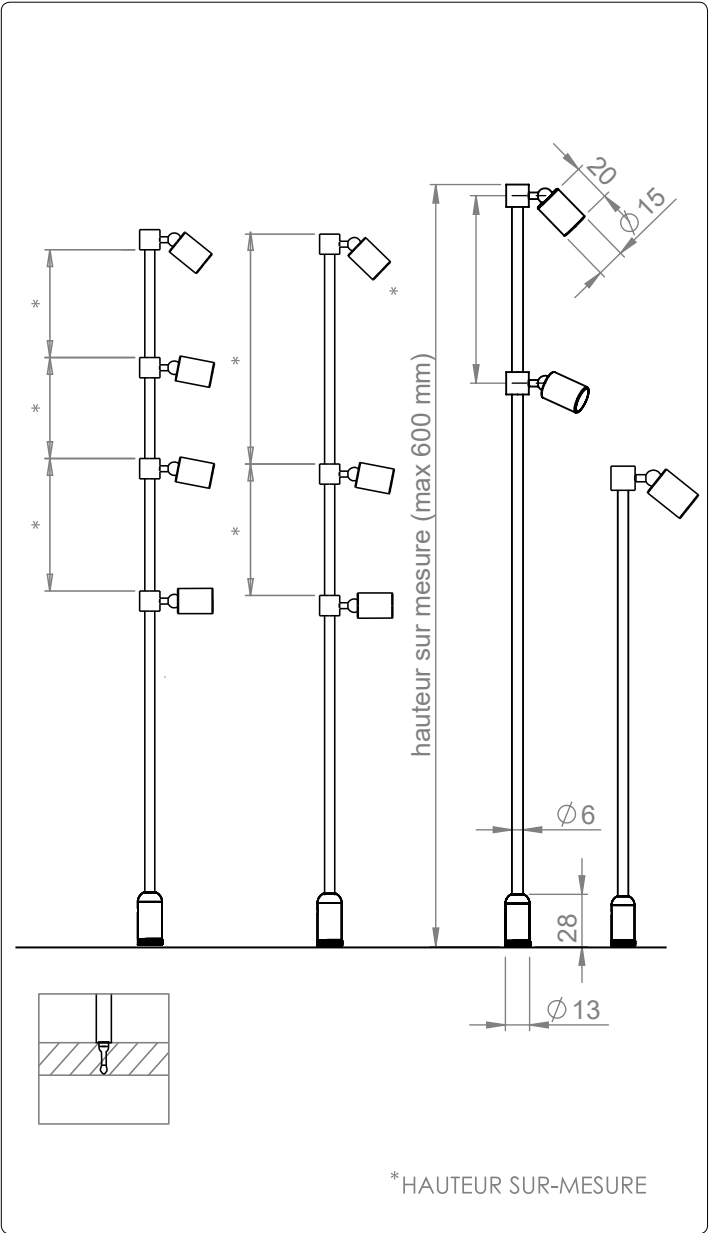

## ↓ OUTPUT

1,5W  
/spot

## ↓ LUMENS

150lm  
/spot

## ↓ CRI

IRC80

IRC90

## ↓ POWER SUPPLY

500mA

## ↓ DIMMING

✓  
1-10V

DMX

## ↓ DEGREES

16°

24°

40°

ELL

## ↓ IP RATING

IP 40

## ↓ USE

↑

## ↓ COLOUR TEMPERATURE

2400K

2700K

3000K

3500K

4000K

5000K

## ↓ STANDARDS COMPLIANCE

EN  
62471

EN  
60598-1

EN  
60598-2

CE

ETL

III

## ↓ COLOURS

BK

WH

CUSTOM

## ↓ SOURCES

- Luminous flux according to Bining: : 150 lumens by spot;
- Colour temperature: : 2400K to 5000K;
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

## ↓ OPTICAL

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 16°, 24°, 40° & ELL

## ↓ ELECTRICAL

- Constant supply 500mA;
- RCA plug
- Reversible polarity and hot plug;
- Power consumption to 3W max, excluding supply;
- Electrical classification: Class III SELV device

## ↓ MECHANICAL

- Mast: 6mm diameter, custom height on request (max 600mm);
- Orientation by patented magnetic ball joint;
- Mounting integrated to the support or "Cover" mounting to be put on the support;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

## ↓ SPECIFICITIES

- Electrolytic treatment available;
- 3 years guarantee..

## ↓ CLASSIFICATION

|                    |            |      |   |             |      |     |    |
|--------------------|------------|------|---|-------------|------|-----|----|
| Product Ref.       |            | MC00 |   |             |      |     |    |
| spots              | x          |      | x |             |      |     |    |
|                    | 1          |      |   |             |      |     |    |
|                    | 2          |      |   |             |      |     |    |
|                    | 3          |      |   |             |      |     |    |
|                    | 4          |      |   |             |      |     |    |
| Specification      |            |      |   | ARCA        |      |     |    |
| Colour             | Noir       |      |   |             | BK   |     |    |
|                    | Blanc      |      |   |             | WH   |     |    |
|                    | RAL        |      |   |             | CU   |     |    |
| Colour temperature | 2400K      |      |   |             |      | 24  |    |
|                    | 2700K      |      |   |             |      | 27  |    |
|                    | 3000K      |      |   |             |      | 30  |    |
|                    | 3500K      |      |   |             |      | 35  |    |
|                    | 4000K      |      |   |             |      | 40  |    |
|                    | 5000K      |      |   |             |      | 50  |    |
| Degrees            | 16°        |      |   |             |      |     | 16 |
|                    | 24°        |      |   |             |      |     | 24 |
|                    | 40°        |      |   |             |      |     | 40 |
|                    | Elliptique |      |   |             |      |     | EL |
| REFERENCE          |            |      |   | MC00x- ARCA | -BK- | 24- | 16 |

# Mast C RCA

## ACCESSORIES

REF : MC00 x - ARCA

MÂTS

EN

### ↓ OPTICAL ACCESSORIES



**ACMMC01OPNIDABBD12**

Honeycomb MICRO C  
Ø12,8mm

### ↓ CONNECTOR POWER SUPPLY IN 24V



**ACSC000COCIRCPXX500**

Piccolo circuit with sheath  
heat-shrinkable for MICRO C

### ↓ CONNECTORS INDEPENDENT CONNECTION TO BATTERIES



**ACSCXXXCOPLITHXX010**

Pack Lithium 10,4Ah



**ACSCXXXCOPLITHXX35**

Lithium Pack Charger  
Charger 29,4V 3,5A



**ACSCXXXCOPLITHXX26**

Pack Lithium 2,6Ah



**ACSCXXXCOPLITHXX06**

Lithium Pack Charger  
Charger 29,4V 0,6A

### ↓ FIXATION



**ACMCCORCAFXXC**

RCA Female  
XX = BK (black), WH (white)  
et CU (custom)