


Spot D8

REF : SD008-A

SPOTS

EN

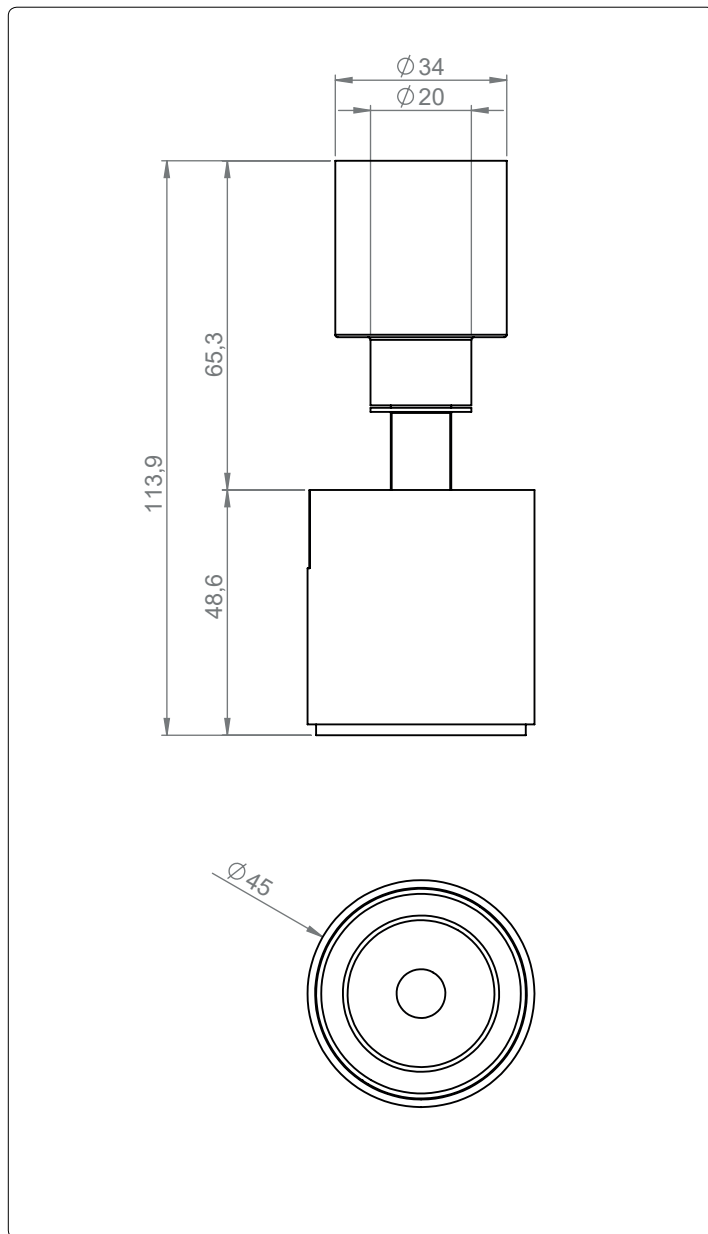

↓ PRODUCT DESCRIPTION

Spot D8 - Powerful LED accent and architectural round spotlight with adjustable aluminium body. Passive heat dissipation for source temperature control preserving LED life / Threaded safety lock. Interchangeable lenses (15°, 25°, 40°, 50° and Elliptical) by simple magnetic contact.

↓ OUTPUT

8W

↓ LUMENS

800lm

↓ CRI

IRC90

↓ POWER SUPPLY

700mA

↓ DIMMING

1-10V



DMX

↓ DEGREES (INTERCHANGEABLE LENSES)

15°

25°

40°

50°

ELL

↓ IP RATING

IP 40

↓ USE



↓ COLOUR TEMPERATURE

2700K

3000K

3500K

4000K

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2



↓ COLOURS

BK

WH

CUSTOM

↓ SOURCES

- Luminous flux according to Bining: 800 lumens
- Colour temperature: 2700 K to 5000 K (2 at 3 Macadam step)
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTIQUES

- PMMA acrylic lens, efficiency ~90 %
- Available degrees: 15°, 25°, 40°, 50° and ELL.

↓ ÉLECTRIQUES

- Constant supply voltage 700mA
- Electric transmission by magnetic contact
- Reversible polarity and hot plug
- Power consumption to 8W max, excluding supply
- Electrical classification: Class III SELV device.

↓ MÉCANIQUES

- Articulating base, patented magnetic ball joint
- Attachment by magnetic contact
- Operating temperature: -5° +40°
- ROHS components
- Interior use only

↓ SPÉCIFICITÉS

- Electrolytic treatment available
- 3 years garantie

↓ NOMENCLATURES

Product Ref.	SD008				
Specification	A				
Color	Black		BK		
	White		WH		
	Aluminium		AL		
	Chrome		CU		
	Gold		CU		
	RAL		CU		
Température	2700K			27	
	3000K			30	
	3500K			35	
	4000K			40	
Degré	15°			15	
	25°			25	
	40°			40	
	50°			50	
	ELL			ELL	
RÉFÉRENCE	SD008-	A-	BK-	27-	15

Spot D8

ACCESSORIES

REF : SD008-A

SPOTS EN

↓ CONNECTORS POWER SUPPLY IN 24V



ACSC005COCIRCPXX200
Piccolo circuit with sheath
heat-shrinkable for SPOT D8

↓ CONNECTORS INDEPENDENT CONNECTION TO BATTERIES



ACSCXXXCOPLITHXX010
Pack Lithium 10,4Ah



ACSCXXXCOCLITHXX35
Charger Pack Lithium
Charger 29,4V 3,5A



ACSCXXXCOPLITHXX26
Pack Lithium 2,6Ah



ACSCXXXCOCLITHXX06
Charger Pack Lithium
Charger 29,4V 0,6A



EUROPLUG

↓ FIXATION/FINITION



ACSCXXXFIPATERBK*APP
Surface mounted SPOT
Black (BK), White (WH), Custom (CU)



ACSCXXXFIPATERBKENC
Recessed peg SPOT
Black (BK), White (WH), Custom (CU)



ACSD0XXFIPATLGBK
Tall peg SPOT
Black (BK), White (WH), Custom (CU)



ACSD0812NIDABBKC
Honeycomb
SPOT D8 ou D12