




## ↓ PRODUCT DESCRIPTION

This spot attaches magnetically to a track equipped with low-voltage conductors. It is extremely easy to install, position, move, and replace. This discreetly elegant light is surprisingly powerful for its small size. It provides high-quality interior lighting and unparalleled efficiency and reliability. The C5 Piccolo spot has a magnetic contact and 360-degree magnetic ball joint. It is suitable for a wide variety of uses, from precision to general lighting.

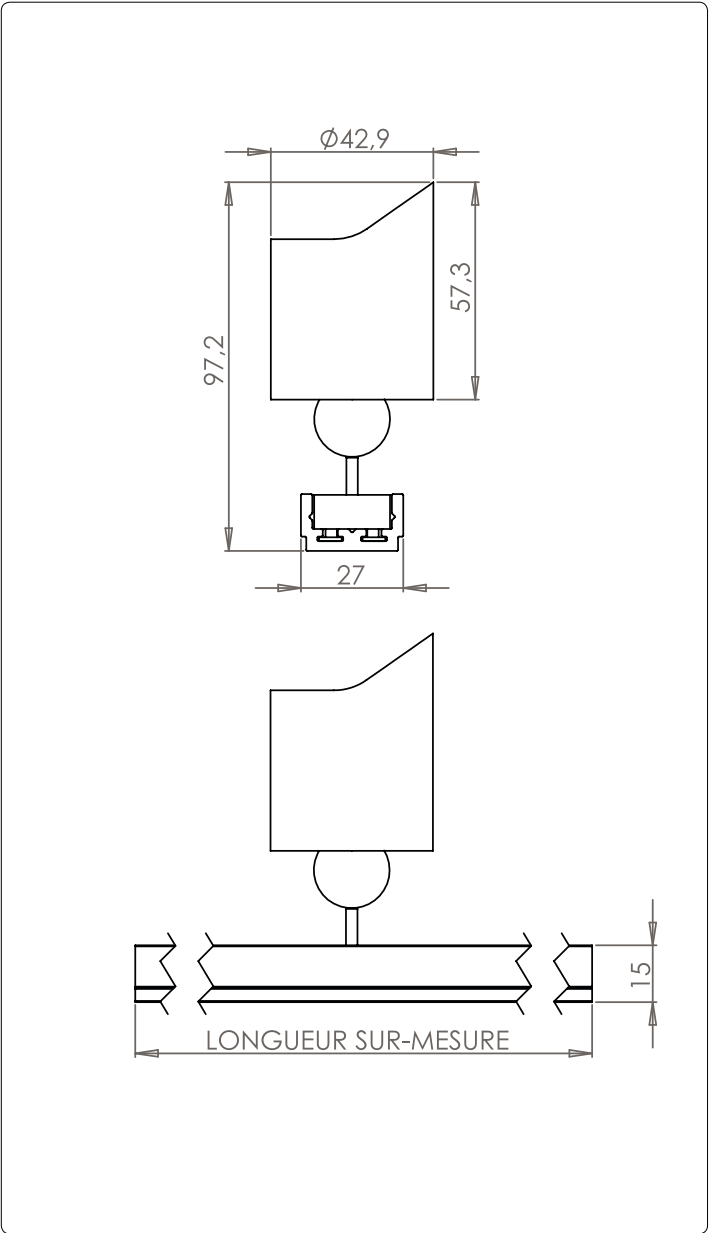

## ↓ OUTPUT



## ↓ POWER SUPPLY




## ↓ IP RATING



## ↓ STANDARDS COMPLIANCE



## ↓ CRI



## ↓ DEGREES



## ↓ COLOUR TEMPERATURE



## ↓ COLOURS



↓ SOURCES

- Luminous flux according to Bining: 800 lumens;
- Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 10°, 20°, 30° et 50°.

↓ ELECTRICAL CHARACTERISTICS

- Constant supply voltage 24V;
- Electric transmission by magnetic contact;
- Reversible polarity and hot plug;
- Power consumption to 9W max, excluding supply;
- Electrical Classification: Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Electronic circuit encased in a fire proof polycarbonate housing;
- Articulating base, patented magnetic ball joint;
- Attachment by magnetic contact;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;
- Electrolytic treatment available;
- Color track profile: White or Black;
- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	SC005				
Specification		P			
Colour	Black			BK	
	White			WH	
	Aluminium			AL	
	Chromium			CU	
	Gold			CU	
	RAL			CU	
Colour temperature	2700K				27
	3000K				30
	3500K				35
	4000K				40
Degrees	15°				15
	25°				25
	40°				40
	ELL				ELL
REFERENCE	SC005 - P - BK - 30 - 15				

# Spot C5 Piccolo

## ACCESSORIES

REF: SC005-P



↓ CONNECTIQUES ALIMENTATION EN 24V



**ACSC005PINDABBKD36**  
Honeycomb C5



**ACSC005OPSNOOTBKL14C**  
Snoot C5 LG



**ACSC001OPSNOOTBKL20C**  
Snoot C5 LG