Spot L5 Piccolo

REF: SL005-P

TRACKS EN

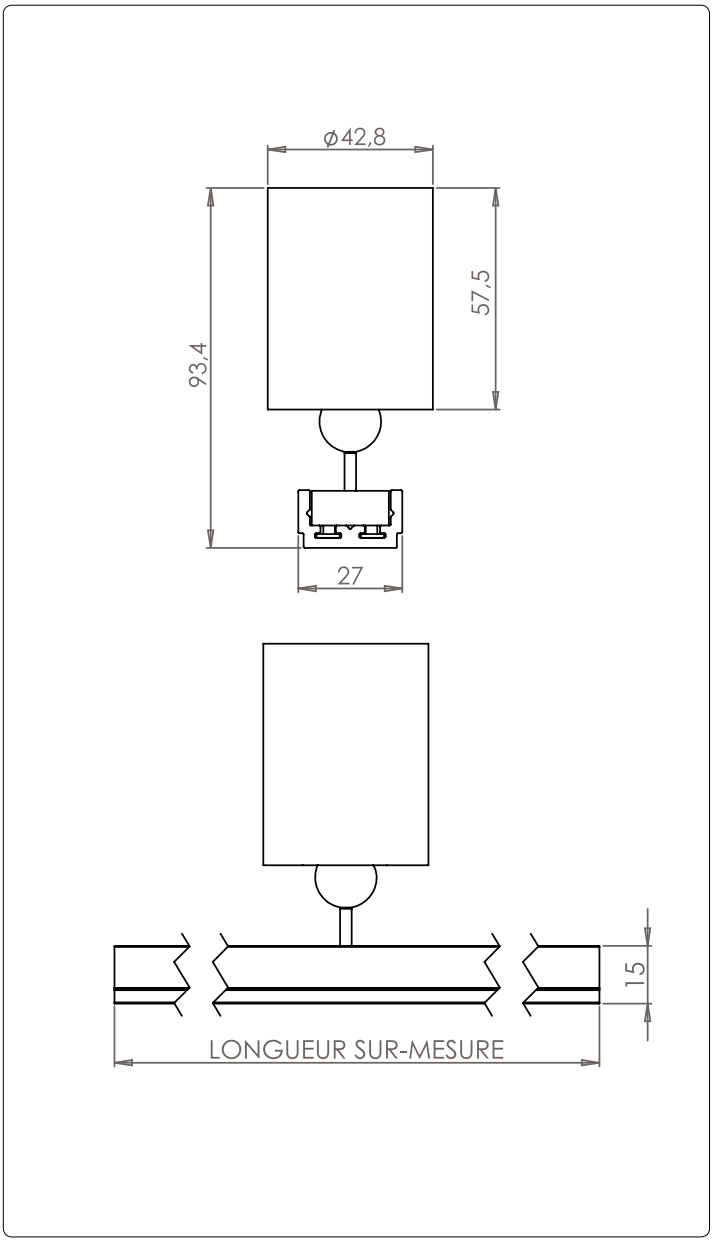

↓ PRODUCT DESCRIPTION

The L5 Piccolo spot is the long version of the C5 Piccolo. This spot attaches magnetically to a track equipped with low-voltage conductors. It is extre - mely easy to install, position, move, and replace. This discreetly elegant light is surprisingly powerful for its small size. It provides high-quality interior ligh - ting and unparalleled efficiency and reliability. With its magnetic contact and 360-degree ball joint, it is suitable for a wide range of precision and general lighting uses.

↓ OUTPUT

9W

↓ LUMENS

800lm

↓ CRI

IRC90

↓ POWER SUPPLY

24V

↓ DIMMING

DALI

↓ DEGREES

15° 25° 40° ELL

↓ IP RATING

IP 40

↓ USE

↓ COLOUR TEMPERATURE

2700K 3000K 3500K 4000K

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE

↓ COLOURS

BK WH CUSTOM

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Design and manufacturing Loupi Lighting systems, all rights reserved.
Registered design and patents.
Specification subjected to change without prior notice.

Spot L5 Piccolo

REF: SL005-P

TRACKS EN

↓ SOURCES
- **Luminous flux according to Bining: 800 lumens;**
- **Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);**
- **Service Range: 70 % of nominal flux after 50 000 hours;**
- **Colour Rendering Index: CRI 90.**

↓ OPTICAL CHARACTERISTICS
- **PMMA acrylic lens, efficiency ~90 %;**
- **Available degrees: 15°, 25°, 40° et ELL.**

↓ ELECTRICAL CHARACTERISTICS
- **Constant supply voltage 24V;**
- **Electric transmission by magnetic contact;**
- **Reversible polarity and hot plug;**
- **Power consumption to 9W max, excluding supply;**
- **Electrical classification: Class III SELV device.**

↓ MECHANICAL CHARACTERISTICS
- **Electronic circuit encased in a fire proof polycarbonate housing;**
- **Articulating base, patented magnetic ball joint;**
- **Attachment by magnetic contact;**
- **Operating temperature: -5° +40°;**
- **ROHS components;**
- **Interior use only.**

↓ SPECIFICITIES
- **Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;**
- **Electrolytic treatment available;**
- **Color track profile: White or Black;**
- **3 years garantee.**

↓ CLASSIFICATION

Product Ref.		SL005					
Specification			P				
Colour	**Black**			BK			
	White			WH			
	Aluminium			AL			
	Chromium			CU			
	Gold			CU			
	RAL			CU			
Colour temperature	**2700K**				27		
	3000K				30		
	3500K				35		
	4000K				40		
Degrees	**15°**					15	
	25°					25	
	40°					40	
	ELL					ELL	
REFERENCE		SL005 -	P -	BK -	30 -	15	

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Design and manufacturing Loupi Lighting systems, all rights reserved.
Registered design and patents.
Specification subjected to change without prior notice.

Spot L5 Piccolo
ACCESSORIES

REF : SL005-P

TRACKS **EN**

↓ OPTICAL ACCESSORIES

ACSC005OPNIDABBKD36
Honeycomb SPOT C5
Ø36,0mm

LOUPI LIGHTING SYSTEMS

T : +33(0)1 49 15 99 99
E : contact@loupi.com
W : www.loupi.com

Conception & fabrication LOUPI Lighting System, droits réservés.
Marques, modèles et brevets déposés, reproduction interdite.
Document non contractuel. Les spécifications peuvent être modifiées sans avis préalable.