


Spot D8


REF : SD008

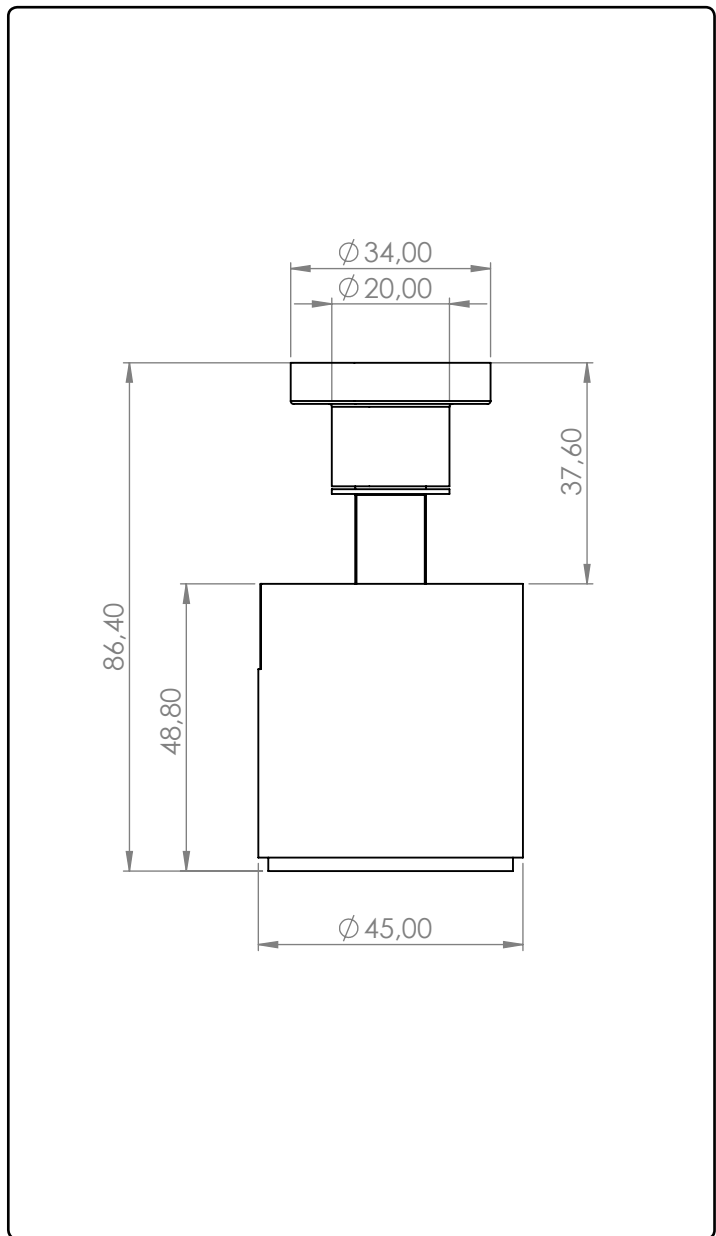


↓ PRODUCT DESCRIPTION

Spot D8 - Powerful LED accent and architectural round spotlight with adjustable aluminium body. Passive heat dissipation for source temperature control preserving LED life / Threaded safety lock. Interchangeable lenses (15°, 25°, 40°, 50° and Elliptical) by simple magnetic contact.

↓ OUTPUT (PEG)



↓ OUTPUT (TRACK, RCA)



↓ CRI




↓ USE



↓ IP



↓ POWER SUPPLY (PEG)




↓ LUMENS



↓ ADJUSTABLE DEGREES



↓ POWER SUPPLY (TRACK, RCA)



↓ DIMMING



↓ COLOUR TEMPERATURE



↓ STANDARDS COMPLIANCE



↓ COLOURS



↓ SOURCES

- Luminous flux according to Bining: **800 lumens**
- Colour temperature : de **2700K to 4000K**
- Service Range: 70 % of nominal flux after 50 000 hours
- Colour Rendering Index: CRI 90

↓ OPTICAL

- PMMA acrylic lens, efficiency ~90%
- Available degrees : **15°, 25°, 40°, 50° et Elliptic**

↓ ELECTRICAL (on peg)

- Power supply **700mA**
- Reversible polarity and hot plug
- Power consumption to **8W** max, excluding supply
- Electrical Classification : Class III SELV device

↓ ELECTRICAL (on tracks or RCA)

- Power supply 24V
- Electric transmission by magnetic contact
- Reversible polarity and hot plug
- Power consumption to **9W** max, excluding supply
- Electrical Classification : Class III SELV device

↓ MECHANICAL

- Electronic circuit encased in a fire-proof polycarbonate housin
- Fixing by magnetic contact (on track)
- Operating temperature : -5° +40°
- Articulating base
- ROHS components
- Interior use only





↓ SPECIFICITIES

- 3 years guarantee

↓ NOMENCLATURE

Product Ref.	SD008				
Specification	Simple peg		A		
	RCA		ARCA		
	Piccolo track		P		
	Slim track magnet		SMA		
	Rail 220 1-10V		RV		
	RAIL 220 DALI		RD		
Degrees	15°			15	
	25°			25	
	40°			40	
	50°			50	
	Elliptic			ELL	
Colour	Black				BK
	White				WH
	Custom				CU
Temperature	2700K				27
	3000K				30
	3500K				35
	4000K				40
REFERENCE	SD008	P	40	BK	27

BEAM ANGLE

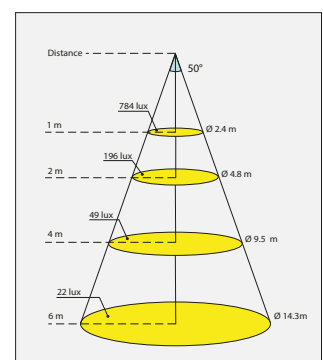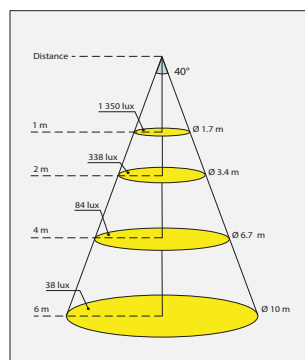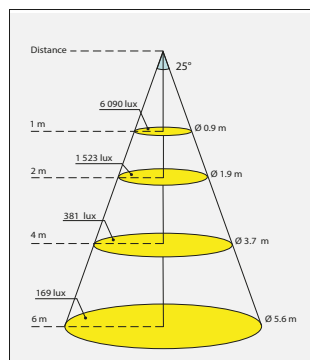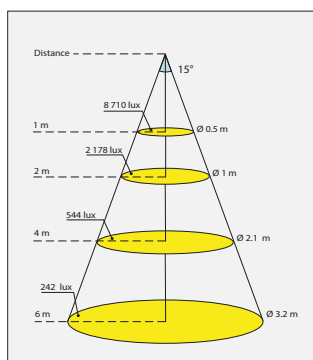

Spot D8

MOUNTING CONFIG.

REF : SD008

SPOT EN

↓ MOUNTING CONFIGURATION




SD008P
Piccolo track Width 27mm



SD008SMA
Slim track Width 13mm



SD008RV
Track 220 0-10V Width 31mm



SD008RD
Track 220 DALI Width 31mm



SD008ARCA
RCA



SD008A...
Fixing mounting simple
(except BA13)
Ø35mm H21mm

**ACCESSORY (OPTIONAL)
TO BE ADDED TO THE
«FIXING MOUNTING SIMPLE»**



ACSFIPATER43XXENCC
Fixing mounting recessed
(driver out)
Ø43mm H34mm



ACSFIPATER60XXENCC
Fixing mounting recessed
(driver in)
Ø60mm H34mm



ACSFIPATER43XXAPPC
Fixing mounting ceiling
(driver out)
Ø43mm H30mm



ACSFIPATER70XXAPPC
Fixing mounting ceiling
(driver in)
Ø70mm H42.5mm

↓ EXAMPLE OF CONFIGURATION

SPOT D - FIXING MOUNTING SIMPLE + FIXING MOUNTING RECESSED Ø60 - **NOIR**
= SD001A-ACSFIPATER60**B**KENCC


Spot D8

ACCESSORIES

REF : SD008

SPOT EN

↓ CONNECTORS INDEPENDENT CONNECTION TO BATTERIES



ACSD008COPLITHXX010
Pack Lithium 10,4Ah



ACSD008COCLITHXX35
Charger Pack Lithium
Charger 29,4V 3,5A



ACSD008COPLITHXX26
Pack Lithium 2,6Ah



ACSD008COCLITHXX06
Charger Pack Lithium
Charger 29,4V 0,6A




EUROPLUG

POWER SUPPLY CONNECTORS



ACSD008COCIRCPXX500
Piccolo circuit with sheath
heat-shrinkable

↓ OPTICAL ACCESSORIES



ACSD008OPNIDABBKD37C
Honey comb D40mm



ACSD008SNOOTBKL10C
Snoot spot D8 + 10mm