






↓ PRODUCT DESCRIPTION

Apollo 6 is a 6W recessed spotlight that can be mounted in either Trim or Trimless configurations. It features a tool-free interchangeable LED and lens system with a CRI98 - R9>90. The entire unit can be rotated 360°, and the spotlight allows for a tilt of up to 45°.

TRIM MOUNTING

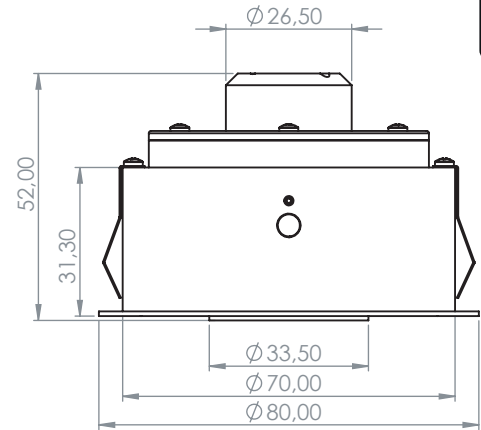


TRIMLESS MOUNTING

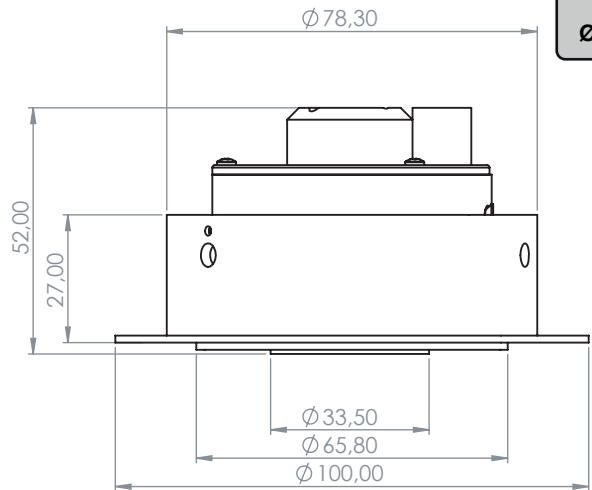

↓ OUTPUT



↓ LUMENS



↓ CRI




↓ USE



↓ IP



↓ POWER SUPPLY



↓ DIMMING



↓ DEGREES




↓ COLOUR TEMPERATURE



↓ COLOURS



↓ STANDARDS COMPLIANCE



↓ SOURCES

- Luminous flux according to Bining: **600 lumens** (for 4000K)
- Colour temperature : **2700K à 4000K**
- Service Range: 70 % of nominal flux after 50 000 hours
- Colour Rendering Index: **CRI 98 - R9>90**

↓ OPTICAL

- PMMA acrylic lens, efficiency ~90%
- Available degrees : **10°, 15°, 25°, 35°, 50° et Elliptic**

↓ ELECTRICAL

- Power supply **350mA ~ 18V**
- Reversible polarity and hot plug
- Power consumption to **6W** max, excluding supply
- Electrical Classification : Class III SELV device

↓ MECHANICAL

- Electronic circuit encased in a fire-proof polycarbonate housin
- Operating temperature : -5° +40°
- 360° rotation
- 40° tilt
- ROHS components
- Interior use only

↓ SPECIFICITIES

- 3 years guarantee

↓ SPOT NOMENCLATURE

Product Ref.	AP006			
Colour	Black		BK	
	White		WH	
	Custom		CU	
Temperature	2700K		27	
	3000K		30	
	3500K		35	
	4000K		40	
Degrees	10°			10
	15°			15
	25°			25
	35°			35
	50°			50
	Elliptic			ELL
REFERENCE	AP006	WH	27	25

↓ TRIM SUPPORT NOMENCLATURE

Trim support	ACAP006TR			
Colour	Black		BK	
	White		WH	
	Custom		CU	
REFERENCE	ACAP006TR	WH	C	


↓ TRIMLESS SUPPORT NOMENCLATURE

Trimless support	ACAP006TLC			
------------------	------------	--	--	--

ORDER REFERENCE (TRIM MOUNTING)



AP006-25-WH-27
Apollo 6 - White(WH) -
2700K(27) - 25°(25).

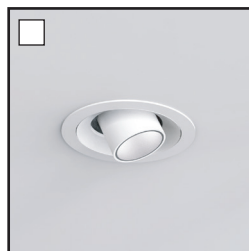

ACAP006TRWHC
Trim support (WH = White)



ORDER REFERENCE (TRIMLESS MOUNTING)




AP012-25-WH-27
Apollo 6 - White(WH) -
2700K(27) - 25°(25).



ACAP006TLC
Trimless support




↓ OPTICAL ACCESSORIES



ACAP006NIDABBK045C
Honey comb D29mm



ACAP006LENHOLXXC
(XX = 10°, 15°, 25°, 35°, 50° ou ELL)
Lens holder



ACAP006LEDHOLAPXX
(XX = 27, 30, 35 ou 40 (00K))
LED holder

↓ BEAN ANGLE

