




↓ PRODUCT DESCRIPTION

This model is part of the D range and is inspired by the D spotlight. However, it stands out with an elongated design, allowing for increased power and superior performance.

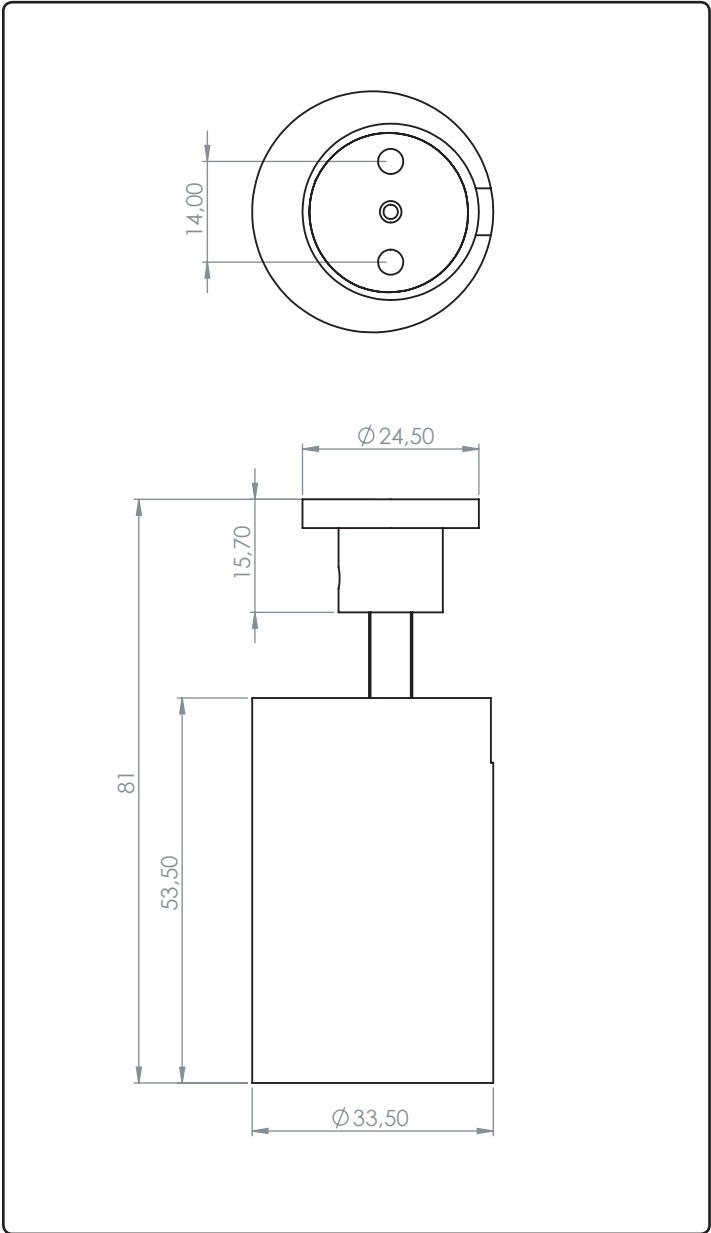

↓ OUTPUT (PEG)

6W

8W

↓ POWER SUPPLY (PEG)

350mA

600lm

↓ POWER SUPPLY (TRACK, RCA)

24V

1-10V

CASAMBI

DMX

↓ STANDARDS COMPLIANCE

EN 62471

EN 60598-1

EN 60598-2

CE

III

ETL

↓ CRI

IRC98  
R9>90

↓ USE

↓ IP

IP 40

↓ DEGREES

10°

15°

25°

35°

50°

ELL

↓ COLOUR TEMPERATURE

2400K

2700K

3000K

3500K

4000K

5000K

↓ COLOURS

BK

WH

CUSTOM



## ↓ SOURCES

- Luminous flux according to Bining: 600lumens
- Colour temperature : de 2400K to 5000K
- Service Range: 70 % of nominal flux after 50 000 hours
- Colour Rendering Index: CRI 97

## ↓ OPTICAL

- PMMA acrylic lens, efficiency ~90%
- Degrees : 10°, 15°, 25°, 35°, 50° and Elliptic

## ↓ ELECTRICAL (on peg)

- Power supply 350mA
- Reversible polarity and hot plug
- Power consumption to 6W max, excluding supply
- Electrical Classification : Class III SELV device

## ↓ ELECTRICAL (on tracks or RCA)

- Power supply 24V
- Electric transmission by magnetic contact
- Reversible polarity and hot plug
- Power consumption to 8W max, excluding supply
- Electrical Classification : Class III SELV device

## ↓ MECHANICAL

- Electronic circuit encased in a fire-proof polycarbonate housin
- Fixing by magnetic contact (on track)
- Operating temperature : -5° +40°
- Articulating base
- ROHS components
- Interior use only

## ↓ SPECIFICITIES

- 3 years guarantee

## ↓ SPOT NOMENCLATURE

Product Ref.	SD006				
Product specification	Simple peg	A			
	RCA	ARCA			
	Piccolo track	P			
	Slim track magnet	SMA			
Colour	Black	BK			
	White	WH			
	Custom	CU			
Temperature	2400K			24	
	2700K			27	
	3000K			30	
	3500K			35	
	4000K			40	
	5000K			50	
Degrees	10°				10
	15°				15
	25°				25
	35°				35
	50°				50
	Elliptic				ELL
REFERENCE	SD006	A	BK	24	10

## ↓ MOUNTING NOMENCLATURE

Mounting spec.	Mounting recessed Ø43	ACSFIPATER43	ENCC
	Mounting recessed Ø60	ACSFIPATER60	ENCAC
	Mounting ceiling Ø50	ACSFIPATER50	APPC
	Mounting ceiling X1spot	ACSFIPA1704030	AP1C
	Mounting ceiling X2spot	ACSFIPA1704030	AP2C
Colour	Black		BK
	White		WH
	Custom		CU
REFERENCE	ACSFIPATER43	BK	ENCC

## ↓ RCA TRIM NOMENCLATURE

Product reference	ACSDRCA	APPC
Colour	Black	BK
	White	WH
	Custom	CU
REFERENCE	ACSDRCA	BK APPC

## ↓ NOMENCLATURES PATERE RCA TRIMLESS

Référence produit	ACSDRCAENCC
-------------------	-------------



# Spot D6


## MOUNTING CONFIG.

REF : SD006


SPOT

EN


### ↓ MOUNTING CONFIGURATION




**SD006A**  
Simple peg Ø24.5mm



**SD006S**  
Slim track Width 13mm








**SD006P**  
Piccolo track Width 27mm



**SD006RCA**  
RCA

### ↓ Beam angle

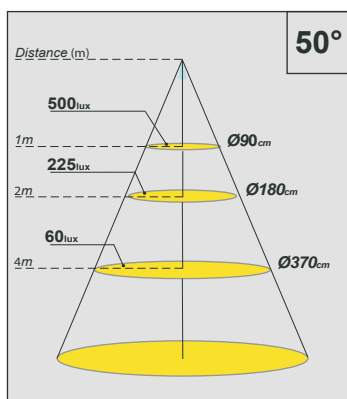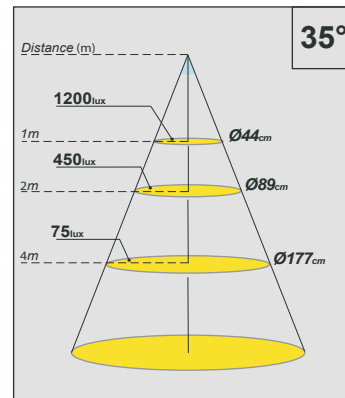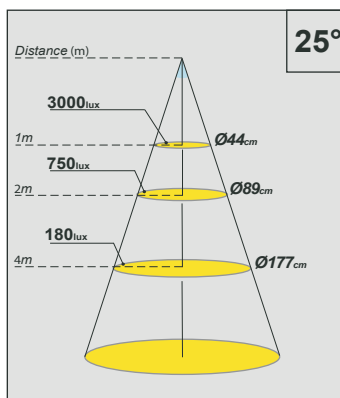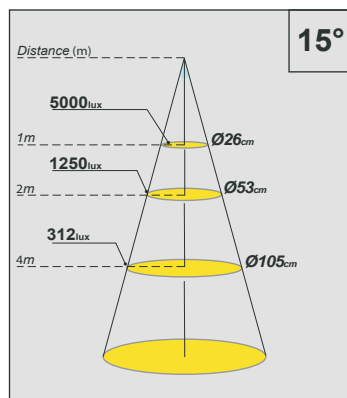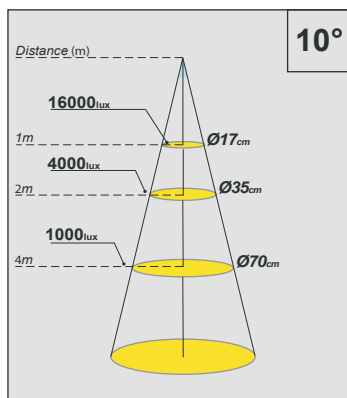




# Spot D6

## ORDER REFERENCE

REF : SD006




### ORDER REFERENCE (MOUNTING NOMENCLATURE)




**SD006A-BK-24**  
Spot D6 - Peg -  
Black(BK) - 2400K(24).

+




**ACS FIPATER 43 XX ENCC**  
Fixing mounting recessed  
Ø43mm H34mm

or




**ACS FIPATER 60 XX ENCC**  
Fixing mounting recessed  
Ø60mm H34mm

or




**ACS FIPATER 50 XX APPC**  
Fixing mounting ceiling  
Ø50mm H30mm

or



**ACS FIPA 1704030 XX AP1C**  
Fixing mounting ceiling  
(driver in)  
x1 spot : 170x40x30mm

or



**ACS FIPA 1704030 WH AP2C**  
Fixing mounting ceiling  
(driver in)  
x2 spots : 170x40x30mm

### ORDER REFERENCE (RCA TRIM NOMENCLATURE)



**SD006-RCA-BK-24**  
Spot D6 - RCA -  
Black(BK) - 2400K(24).

+




**ACS DRCABK APPC**  
Mounting RCA trim - Black(BK)  
(Ø50mm)

=




### ORDER REFERENCE (RCA TRIMLESS NOMENCLATURE)




**SD006-RCA-BK-24**  
Spot D6 - RCA -  
Black(BK) - 2400K(24).

+



**ACS DRC AENCC**  
Mounting RCA trimless

=





# Spot D6


## ACCESSORIES

REF : SD006

SPOT


EN

### ↓ RCA ACCESSORIES




**ACSDRCABOUCHONXXC**  
Finishing cap for RCA trim &  
trimless mounting

### ↓ POWER SUPPLY CONNECTORS



**ACSD006COCIRCPXX500**  
Piccolo circuit with sheath  
heat-shrinkable

### ↓ OPTICAL ACCESSORIES



**ACSC001OPNIDABBKD28C**  
Honeycomb Ø28mm