




↓ PRODUCT DESCRIPTION

This mast with three miniature spots is designed for precision lighting. Its excellent performance and small, sleek design make it very easy to fit in shop windows, display units, and other small spaces. It has multiple configurations: Surface finish, pole height, distance between each spots, colour temperature and beam angle.

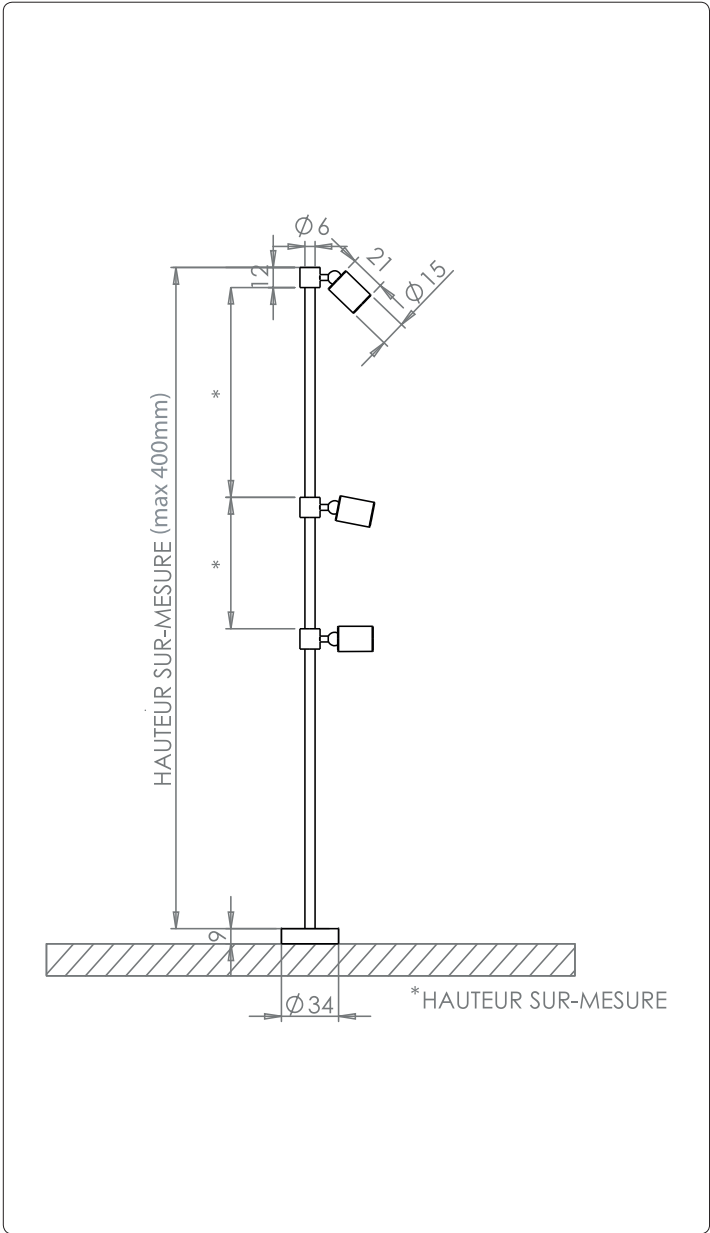

↓ OUTPUT

4,5W 150lm /spot

↓ POWER SUPPLY

500mA 1-10V DMX CASAMBI

↓ IP RATING

IP 40

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE ETL III

↓ CRI

IRC90

↓ DEGREES

16° 24° 40° ELL

↓ COLOUR TEMPERATURE

2400K 2700K 3000K 3500K 4000K 5000K

↓ COLOURS

BK WH CUSTOM

- ↓ SOURCES
 - Luminous flux according to Bining: 150 lumens by spot;
 - Colour temperature: 2400 K to 5000 K;
 - Service Range: 70 % of nominal flux after 25 000 hours;
 - Colour Rendering Index: CRI 90.
- ↓ OPTICAL CHARACTERISTICS
 - PMMA acrylic lens, efficiency ~90 %;
 - Available degrees: 16°, 24°, 40° & Elliptic.
- ↓ ELECTRICAL CHARACTERISTICS
 - Constant current supply: 500 mA;
 - Supply connection: Polarised output connectors;
 - Power consumption to 4.5W max, excluding supply;
 - Electrical Classification: Class III SELV device.
- ↓ MECHANICAL CHARACTERISTICS
 - Mast: Diameter 6mm, Made-to-measure heights on request (Max: 400mm);
 - Orientation by patented magnetic ball joint;
 - Fixing integrated with bracket, or fixing cover attached to it;
 - Operating temperature: -5° +40°;
 - ROHS components;
 - Interior use only.
- ↓ SPÉCIFICITÉS
 - Electrolytic treatment available;
 - 3 years guarantee.

↓ CLASSIFICATION					
Product Ref.		MC003			
Specification		A			
Colour	Black			BK	
	White			WH	
	Chromium			CU	
	Brass			CU	
	Brushed nickel			CU	
	RAL			CU	
Colour temperature	2400K			24	
	2700K			27	
	3000K			30	
	3500K			35	
	4000K			40	
	5000K			50	
Degrees	16°				16
	24°				24
	40°				40
	Elliptic				EL
REFERENCE		MC003- A - BK - 24 - 16			

Mast 3C

ACCESSORIES

REF: MC003-A

MAST

EN

↓ OPTICAL ACCESSORIES



ACMMC01OPNIDABBKD12
Nid d'abeille MICRO C
Ø12,8mm



ACSC000OPSNOOTBKL14
Snoot MICRO C
Ø12,8mm Lg 14mm Black



ACSC000OPSNOOTBKL20
Snoot MICRO C
Ø12,8mm Lg 20mm Black

↓ CONNECTORS JACK/POWER SUPPLY IN 24V



ACMCXXXCOPRJAKSTXXX
RCA Male MAT C standard



ACMCXXXCOPRJAKBKXXX
RCA Female
MAT C with black or white cap



ACSC000COCIRCPXX500
Piccolo circuit with sheath
heat-shrinkable for MICRO C

↓ CONNECTORS INDEPENDENT CONNECTION TO BATTERIES



ACSCXXXCOPLITHXX010
Pack Lithium 10,4Ah



ACSCXXXCOCLITHXX35
Lithium Pack Charger
29,4V 3,5A



ACSCXXXCOPLITHXX26
Pack Lithium 2,6Ah



ACSCXXXCOCLITHXX06
Lithium Pack Charger
29,4V 0,6A



EUROPLUG