


Spot C5 Piccolo

REF: SC005-P

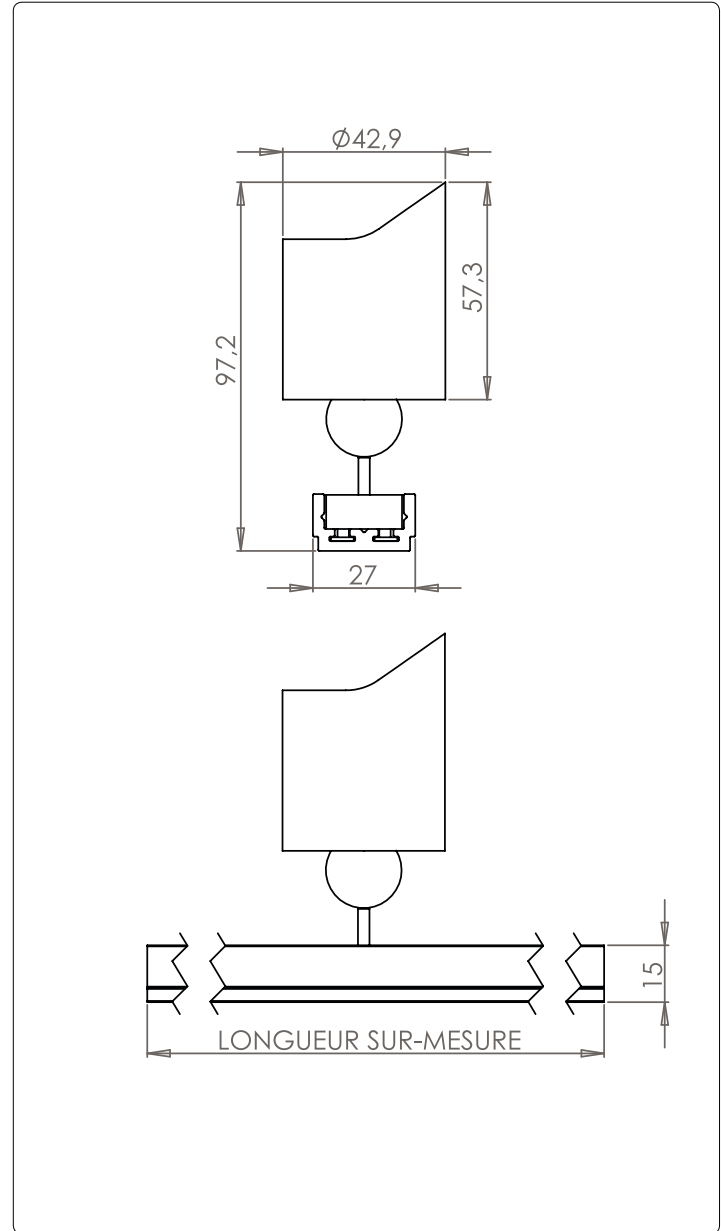

↓ PRODUCT DESCRIPTION

This spot attaches magnetically to a track equipped with low-voltage conductors. It is extremely easy to install, position, move, and replace. This discreetly elegant light is surprisingly powerful for its small size. It provides high-quality interior lighting and unparalleled efficiency and reliability. The C5 Piccolo spot has a magnetic contact and 360-degree magnetic ball joint. It is suitable for a wide variety of uses, from precision to general lighting.

↓ OUTPUT

9W

↓ LUMENS

800lm

↓ CRI

IRC90

↓ POWER SUPPLY

700mA

↓ DIMMING

↓ DEGREES

15° 25° 40° ELL

↓ IP RATING

IP 40

↓ USE

↓ COLOUR TEMPERATURE

2700K 3000K 3500K 4000K

↓ STANDARDS COMPLIANCE

EN 62471 EN 60598-1 EN 60598-2 CE ETL III

↓ COLOURS

BK WH CUSTOM

↓ SOURCES

- Luminous flux according to Bining: 800 lumens;
- Colour temperature: 2700 K to 4000 K (2 at 3 Macadam step);
- Service Range: 70 % of nominal flux after 50 000 hours;
- Colour Rendering Index: CRI 90.

↓ OPTICAL CHARACTERISTICS

- PMMA acrylic lens, efficiency ~90 %;
- Available degrees: 10°, 20°, 30° et 50°.

↓ ELECTRICAL CHARACTERISTICS

- Constant supply voltage 24V;
- Electric transmission by magnetic contact;
- Reversible polarity and hot plug;
- Power consumption to 9W max, excluding supply;
- Electrical Classification: Class III SELV device.

↓ MECHANICAL CHARACTERISTICS

- Electronic circuit encased in a fire proof polycarbonate housing;
- Articulating base, patented magnetic ball joint;
- Attachment by magnetic contact;
- Operating temperature: -5° +40°;
- ROHS components;
- Interior use only.

↓ SPECIFICITIES

- Mechanical adjustment of its intensity (from 5% to 100%) by a «calibrator»;
- Electrolytic treatment available;
- Color track profile: White or Black;
- 3 years guarantee.

↓ CLASSIFICATION

Product Ref.	SC005			
Specification		P		
Colour	Black		BK	
	White		WH	
	Aluminium		AL	
	Chromium		CU	
	Gold		CU	
	RAL		CU	
Colour temperature	2700K			27
	3000K			30
	3500K			35
	4000K			40
Degrees	15°			15
	25°			25
	40°			40
	ELL			ELL
REFERENCE	SC005 - P - BK - 30 - 15			

Spot C5 Piccolo

ACCESSORIES

REF: SC005-P

TRACKS 

↓ CONNECTIQUES ALIMENTATION EN 24V



ACSC005PINDABBKD36
Honeycomb C5



ACSC005OPSNOOTBKL14C
Snoot C5 LG



ACSC001OPSNOOTBKL20C
Snoot C5 LG